


# Delock Adapter HDMI-A male > Displayport female

## Description

This adapter by Delock enables you to connect e.g. a Displayport monitor through a free HDMI interface.

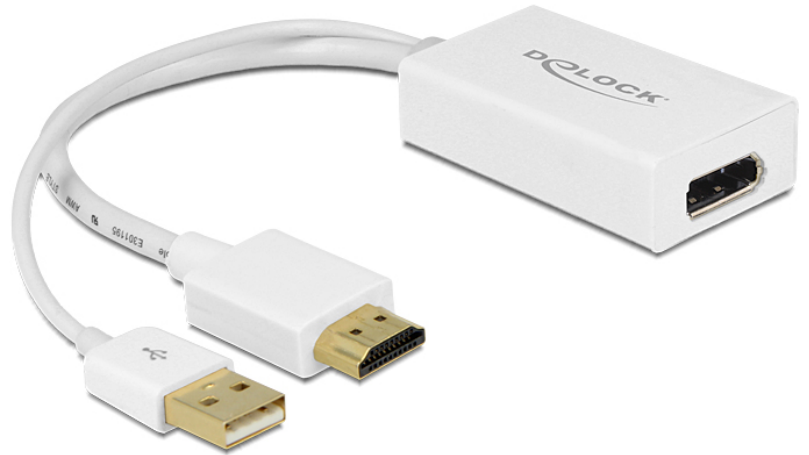

24,5 cm

## Specification

- Connector:
  - Input:
    - 1 x High Speed HDMI-A 19 pin male
    - 1 x USB type A male (power supply)
  - Output:
    - 1 x Displayport 20 pin female
- Chipset: STDP2600
- Displayport 1.2 and High Speed HDMI specification
- High Speed HDMI receiver - link rate up to 2.97 Gb/s per data pair
- 3D support
- Supports a resolution up to 4Kx2K @ 30 Hz;  
1920 x 1080 Pixel @ 120 Hz  
(depending on the system and the connected hardware!)
- Supports Audio 7.1 channel up to 192 kHz sample rate
- Supports HDCP 1.3
- Gold-plated connector
- Color depth:
  - RGB / YCC (4:4:4) - 16 bit colour
  - YCC (4:2:2 / 4:2:0) - 16 bit colour
- Power consumption:
  - operation: ca. 500 mW
  - standby: ca. 25 mW
- Colour: white
- Cable length: ca. 24.5 cm (incl. connector)
- OS independent, no driver installation necessary

## Item No. 62496



EAN 4043619624966

Country of origin China

### System requirements

- A free HDMI-A female port
- A free USB-A female port
- Monitor with a free Displayport female port
- One Displayport cable

### Package content

- Adapter HDMI to Displayport
- User manual

### Package

- Retail Box

### Images

