
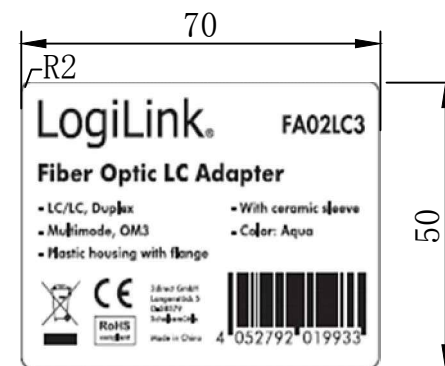


NOTE:
 ROHS 2.0 AND REACH COMPLIANT
 PACKING: 25PCS/BLISTER 100PCS/PE BAG+LABEL

Insertion Loss (dB)	≤ 0.30
Operating Temperature (° C)	-40 ~ +80
Storage Temperature (° C)	-40 ~ +85

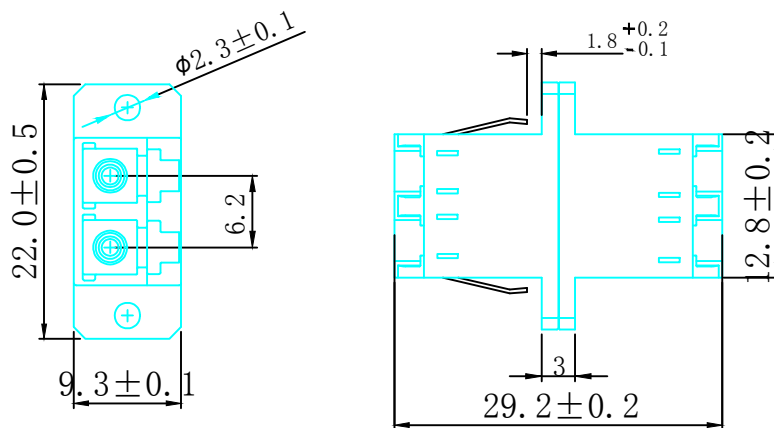

MATERIAL LIST:

⑥	LC aqua Body (SC simplex footprint)	1pcs	
⑤	LC Sleeve ceramic (Multi-Mode)	1pcs	
④	Aqua bush	2pcs	
③	LC aqua Body (SC simplex footprint)	1pcs	
②	LC Metal Mount	1pcs	
①	LC White Dust Cap	4pcs	
NO.	SPECIFICATION STANDARD	QT' Y	REMARK

LogiLink Professional

		NEW		2015-12-01	A	DRAWNBY	CHECKBY	APPOBY	DATE
BY	CHK	REVISION RECORD MODIFICATIONS		DATE	REV.				2015-12-01

PRODUCT NAME	LC OM3 aqua (ceramic) Duplex Plastic Adapter (SC SX Footprint)	ITEM NO.		UNIT	MM
--------------	----------------------------------------------------------------	----------	--	------	----