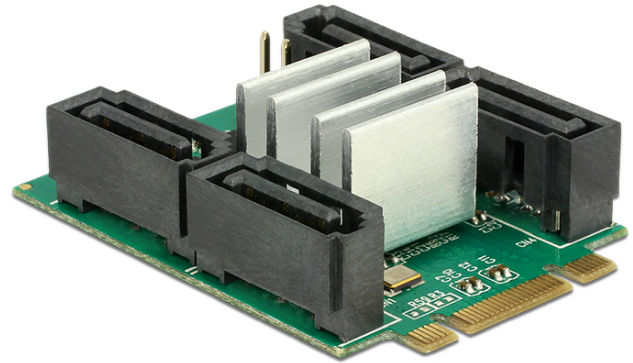**DELOCK®**

we move the world

Delock Converter M.2 Key B+M male > Hybrid 4 x SATA 7 pin male with RAID

Description

This converter by Delock expands the system by four SATA ports. When using more than one SATA port, there is the possibility to use different RAID modes. The converter supports a hyperduo function. With this function it combines an SSD and an HDD to use the advantages of both data mediums, the speed of an SSD and the capacity of an HDD.

M.2

Specification

- Connectors:
  1 x 59 pin M.2 key B+M male >
  4 x SATA 6 Gb/s 7 pin plug
  1 x 2 pin pin header for LED
- Chipset: Marvell
- Interface: PCIe 2.0
- Form factor: M.2 3042
- Suitable for M.2 slot with key M or B+M based on PCIe
- Data transfer rate up to 6 Gb/s
- Supports Raid 0, 1, 10, JBOD, HyperDuo Virtual Disk (Safe/Capacity)
- Supports HDD and SSD
- Supports Native Command Queuing (NCQ)
- Bootable
- Dimensions (LxWxH): ca. 42 x 30 x 13 mm

System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux Kernel 4.4
- One free M.2 key M slot

Package content

- Converter
- Driver CD
- User manual

Item No. 62850

EAN: 4043619628506

Country of origin: China

Package: Retail Box

Adapter

Images

General

Form factor:	M.2 3042
function:	bootable
Supported operating system:	Linux Kernel 4.4
	Windows 7 32-bit
	Windows 7 64-bit
	Windows 8.1 32-bit
	Windows 8.1 64-bit
	Windows 10 32-bit
	Windows 10 64-bit
Slot:	PCIe

Interface

connector 1:	1 x 59 pin M.2 key B+M male
connector 2:	4 x SATA 6 Gb/s 7 pin plug
connector 3:	1 x 2 pin pin header for LED

Technical characteristics

Data transfer rate:	6 Gb/s
RAID function:	JBOD
	10
	HyperDuo Virtual Disk
	0
	1

Physical characteristics

Length:	42 mm
Width:	30 mm
Height:	13 mm