


# Delock 2.5" Converter SATA 22 pin > M.2 / mSATA with frame 7 mm

**M.2**

## Description

This converter by Delock enables the connection of an M.2 SSD in 2280, 2260, 2242 and 2230 format or an mSATA module in full size or half size format. If both slots are occupied, only the M.2 SSD can be used. The converter can be installed into the system through the SATA interface.

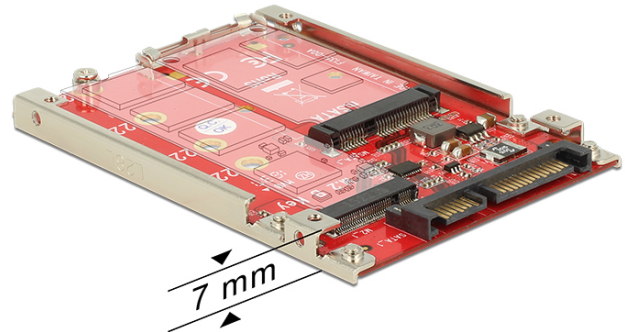

## Specification

- Connector:
  - 1 x SATA 6 Gb/s 22 pin plug >
  - 1 x 67 pin M.2 key B slot
  - 1 x mSATA slot (half size / full size)
- Interface: SATA
- Form factor: 2.5"
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
- Maximum height of the components on the module: 1.5 mm application of double-sided assembled modules supported
- Maximum power for modules: 4 A
- Bootable
- Dimensions (LxWxH): ca. 100 x 70 x 7 mm

## System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 2.6.x / Kernel 4.x.x
- A free SATA 22 pin interface

## Package content

- Converter
- 2.5" frame
- Mounting material
- User manual

Item No. 62859

EAN: 4043619628599

Country of origin: Taiwan, Republic of China

Package: Retail Box



## Images



General	
Form factor:	2.5"
function:	bootable
Supported operating system:	Linux ex Kernel 2.6.x Linux ex Kernel 4.x.x Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit
Slot:	SATA
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported
Interface	
connector 1:	1 x SATA 6 Gb/s 22 pin plug
connector 2:	1 x 67 pin M.2 key B slot
connector 3:	1 x mSATA slot (half size / full size)
Physical characteristics	
Length:	100 mm
Width:	70 mm
Height:	7 mm