


Item No. 62962

Delock Converter mSATA male > 2 x SATA 7 pin male with RAID

Description

This converter by Delock expands the system by two SATA ports. When using more than one SATA port, there is the possibility to use different RAID modes. Through the predetermined breaking point, the length can be shortened from full size to half size.

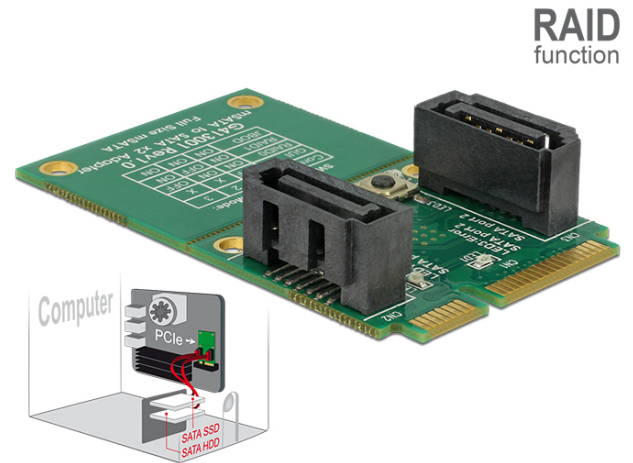

Specification

- Connectors:
1 x 52 pin mSATA / Mini PCI Express male >
2 x SATA 6 Gb/s 7 pin plug
- Chipset: Asmedia ASM1092R
- Interface: SATA
- Form factor: full size / half size
- Data transfer rate up to 6 Gb/s
- Supports RAID 0, 1, JBOD
- Supports HDD and SSD
- Bootable
- 1 x button for RAID setting
- 1 x DIP switch for RAID mode
- Dimensions (LxWxH): ca. 51 x 30 x 11 mm

System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 2.6.38 / Kernel 4.9.4
- A free mSATA interface

Package content

- Converter
- User manual

Additional Information


EAN: 4043619629626

Country of origin: Taiwan, Republic of China

Package: Retail Box



Images



General	
Form factor:	mSATA
function:	bootable
Supported operating system:	Linux ex Kernel 4.9.4 Linux ex Kernel 2.6.38 Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit
Slot:	SATA
Interface	
connector 1:	1 x 52 pin mSATA / Mini PCI Express male
connector 2:	2 x SATA 6 Gb/s 7 pin plug
Technical characteristics	
Chipset:	Asmedia ASM1092R
Data transfer rate:	6 Gb/s
RAID function:	JBOD 0 1
Physical characteristics	
Length:	51 mm
Width:	30 mm
Height:	11 mm