


Delock PCI Express x4 Card > 1 x external USB Type-C™ female with PD function max. 93 Watt + 1 x external USB 3.1 Type-A female

Description

This PCI Express card by Delock expands the PC by two external USB 3.1 ports. Different USB devices, such as docking stations, card readers, external enclosures etc., can be connected to the card. The USB Type-C™ port supports Power Delivery, which allows the connection, for example, of a printer with USB Type-C™ interface. The printer will receive the power from the PCI Express card.

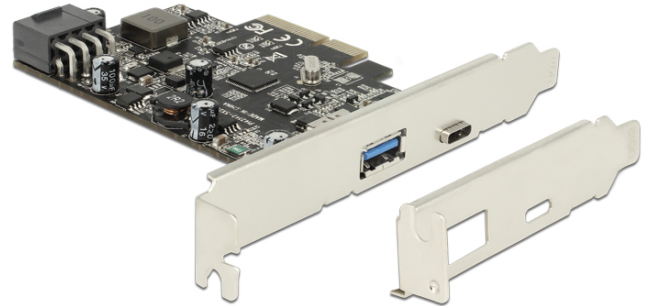

Special features

Provides power for USB Type-C™ devices such as smartphones, tablets, printers etc.

Specification

- Connectors:
 - external:
 - 1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) USB Type-C™ female (data transmission + Power Delivery)
 - 1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) Type-A female
 - internal:
 - 1 x 8 pin power female
 - 1 x PCI Express x4, V3.0
- Chipset: Asmedia ASM2142 + Texas Instruments TPS25741
- Data transfer rate up to:
 - SuperSpeed USB 10 Gbps,
 - SuperSpeed USB 5 Gbps,
 - Hi-Speed 480 Mbps,
 - Full-Speed 12 Mbps,
 - Low-Speed 1.5 Mbps
- Downwards compatible to USB 3.0, USB 2.0, USB 1.1
- Electrical power per port:
 - USB Type-C™: max. 93 Watt (20 V / 4.64 A); 60 Watt (20 V / 3 A); 36 Watt (12 V / 3 A)
 - USB Type-A: max. 4.5 watt (5 V / 0.9 A)
- Supports USB Power Delivery 2.0
- Supports eXtensible Host Controller Interface (xHCI) specification 1.1

System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, Linux ex Kernel 4.6
- PC with one free PCI Express x4 / x8 / x16 / x32 slot
- Power supply with a free 8 pin power connector

Package content

- PCI Express card SuperSpeed USB 10 Gbps
- Low profile bracket
- Driver CD
- User manual

Item no. 89606

EAN: 4043619896066

Country of origin: China

Package: Retail Box



Images



General	
Specification:	SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) USB Power Delivery 2.0
Supported operating system:	Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit ex Linux Kernel 4.6
Interface	
External:	1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) USB Type-C™ female 1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) Type-A female
Internal:	1 x PCI Express x4, V3.0 1 x 8 pin power connector
Technical characteristics	
Chipset:	Asmedia ASM2142 Texas Instruments TPS25741
Data transfer rate:	USB 3.1 Gen 2 up to 10 Gb/s
Physical characteristics	
Slot bracket:	standard low profile