

WGR-8032 Version: 1

AC1750 Dual Band Wireless Gigabit Router

The LevelOne WGR-8032 is an 802.11ac/n Dual Band Wireless Router, boasting exceedingly fast 1750Mbps speeds, very high security levels and operating bands on both 2.4 and 5GHz frequencies. With 4 built-in Gigabit LAN ports, this is an excellent choice for the modern professional working environment or smart home.



Key Features

- Share your wireless network up to 1750Mbps
- For IEEE 802.11a/b/g/n/ac Wireless applications in 2.4/5 GHz frequency range
- Auto Channel Selection for low interference band
- Simple wireless connectivity and security with WPS push button
- Wireless signal on/off button

Specifications

System Specifications

Standards & Protocols:

IEEE 802.3 10-BASE-T, Ethernet

IEEE 802.3u 100-BASE-TX, Fast Ethernet

IEEE 802.11e Wi-Fi Multimedia (WMM)

IEEE 802.11a, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n, IEEE 802.11AC Wireless Networking

**Memory:**

8MB Flash Rom
128MB DDR3

Connectors and Cabling:

1x 10/100/1000Mbps Base-TX WAN Port
4x 10/100/1000Mbps Base-TX LAN Port

Button/Knob:

Power
Reset button
WPS button
Wifi button

Indicator:

PWR
2.4G WLAN
5G WALN
WAN Link/Act
LAN Link/Act

Power Input:

Power supply DC12V / 1.5A

Number of NAT Sessions:

11000

MAC Address Table:

20

Data Transfer Rate:

LAN/WAN: 10/100/1000Mbps

Wireless

Operating Mode:

AP, Repeater, Bridge

Encryption:

WEP 64/128-bit Web share key encryption WPA,WPA2,802.1x
WPA, WPA2-PSK TKIP/AES encryption, WPA-PSK802.1x

Receive Sensitivity(dBm):

2.4G

802.11n (20MHZ_MCS0): Range?-85? dBm

802.11n (40MHZ_MCS0): Range (-82) dBm

802.11g 6Mbps: Range (-85) dBm

802.11g 54Mbps: Range (-68) dBm

802.11b 1Mbps: Range (-83) dBm

802.11b 11Mbps: Range (-76) dBm

5GHz:

802.11a 6Mbps: Range (-85) dBm

802.11a 54Mbps: Range (-65) dBm

802.11n (20MHZ_MCS0): Range (-82) dBm

802.11n (40MHZ_MCS0): Range (-79) dBm

802.11ac (20MHZ_MCS0): Range (-82) dBm

802.11ac (40MHZ_MCS0): Range (-79) dBm

802.11ac (80MHZ_MCS0): Range (-76) dBm

Channel:

Ch.1 ~ 11 USA

Ch.1 ~ 13 EU

Ch.36~48

Ch. 52~ 165

EIRP(dBm):

(Controllable for different country regulations)

802.11ac: up to 15dBm ± 1dBm

802.11n: up to 17dBm ± 1dBm

802.11g: up to 20dBm ± 1dBm

802.11b: up to 20dBm ± 1dBm

Antenna:

4x 5dBi Dual Band external Antenna

Frequency Band:

2.4 ~ 2.4835 GHz

5.15 ~ 5.25 GHz

5.25 ~ 5.825 GHz

Data Transfer Rate:

802.11ac : 1.3Gbps

802.11n: 450Mbps

802.11g: 54Mbps

802.11b: 11Mbps

Features

General:

Quality of Service (QoS): IEEE 802.11e Wi-Fi Multimedia (WMM)

VPN: PPTP, IPSec, L2TP Passthrough

DNS: Dynamic DNS (DDNS)

Multi-SSID: 2 SSIDs, Multi-SSID: 4 SSIDs

Client Isolation

SSID Isolation

Security:

NAT Firewall

Virtual Server

DMZ

Schedule-Based MAC

Filtering SSID Broadcast On/Off

Management:

Web-Based GUI Configuration

Performance

Operating Distance:

?50m

Environment

Temperature (°C):

Storage: -20 – 70°C

Operating: 0 – 40°C

Humidity (Non-condensing):

Storage: 20 ~ 95%

Operating: 20 ~ 90%

Installation:

Desktop

Physical Specifications



Dimensions (W x D x H mm):

174X 118X 30mm

Weight (g):


0.355kg

Approval and Compliance

EMI/EMS:

CE

Diagram

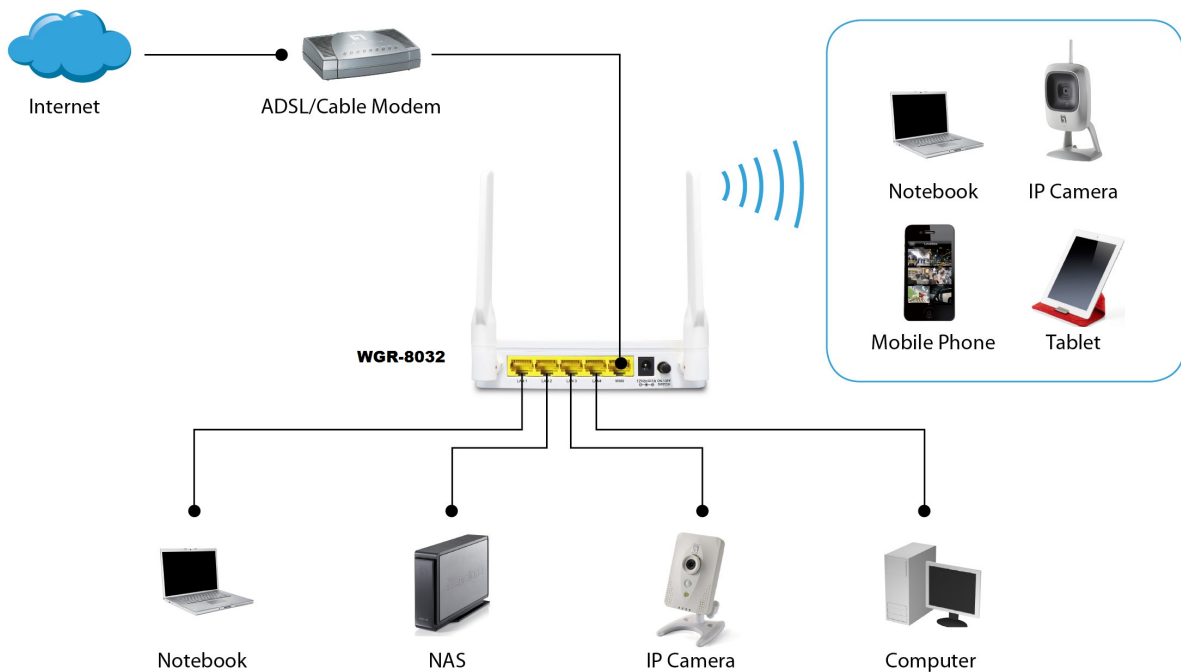

Order Information

WGR-8032

Package Contents

WGR-8032

Quick Installation Guide

RJ45 Network Cable

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.