



Wireless AC1200 Dual Band Gigabit Router

WF2780

Features

- Wi-Fi speed at up to 867Mbps based on 802.11ac, ideal for larger homes with multiple devices.
- Speeds up to 867Mbps on 5GHz and 300Mbps on 2.4GHz simultaneously.
- 4*5dBi antennas for good range.
- Five gigabit ports provide 10 times faster than conventional Fast Ethernet connections.



AC
1200

Dual
Band
2.4G&5G

WPS

5dBi
Antenna

Description

The netis WF2780 Wireless AC Router delivers next generation Wi-Fi at Gigabit speeds. With simultaneous dual band Wi-Fi technology, it offers speeds up to 1200Mbps(N300Mbps + AC867Mbps) and avoids interference, ensuring top WiFi speeds and reliable connections. This makes it ideal for larger homes with multiple devices. In addition, WF2780 provides Gigabit wired connectivity, which is 10 times faster than conventional Fast Ethernet connections. Ideal for high speed file transfers and streaming HD media.

Specification

Wireless	
Standards	IEEE802.11n/g/b;IEEE 802.11ac/a;IEEE802.3/3u/ab
Signal Rate	2.4GHz Up to 300Mbps 5 GHz UP to 867Mbps
Frequency Range	2.4-2.4835GHZ;5.180-5.825GHZ
Transmit Power	20dBm(MAX)
Data Transfer Rates	802.11ac: 80MHZ(433Mbps) 160MHZ(867Mbps) 802.11n: 40MHZ(300Mbps, 270Mbps, 240Mbps, 180Mbps, 120Mbps, 90Mbps, 60Mbps, 30Mbps) 20MHz (144Mbps, 130Mbps, 115Mbps, 86Mbps, 57Mbps, 43Mbps, 28Mbps, 14Mbps) (Auto-Sense) 802.11g: (54Mbps, 48Mbps, 36Mbps, 24Mbps, 18Mbps, 12Mbps, 11Mbps, 9Mbps, 6Mbps) 802.11b: (11Mbps,9Mbps, 6Mbps, 5.5Mbps, 2Mbps, 1Mbps)
Wireless Modes	AP, WDS, AP+WDS, Repeater, Client, Multiple AP
Wireless Security	64/128-bit WEP, WPA-PSK/WPA2-PSK (TKIP/AES),WPA/WPA2 SSID Broadcast Enable/Disable Wireless MAC Filtering


Hardware	
Standards	IEEE 802.3 10Base-T, IEEE 802.3u 100Base-TX, IEEE 802.3u 1000Base-TX

Interfaces	1 * 10/100/1000M Auto MDI/MDIX RJ45 WAN port 4 * 10/100/1000M Auto MDI/MDIX RJ45 LAN port
LED Indicators	PWR, WPS, SYS, 2.4G, 5G LAN1 ~4, WAN , WPS
Buttons	Default, WPS
Antenna	4 * external 5dBi antenna, omni-directional antennas
Power Supply	DC 12V/1A(Output)
Dimensions (L x W x H)	145 x 155 x 35 mm
Weight	285g

Software	
WAN Type	DHCP(Dynamic IP), PPPoE, Static IP, WISP
Port Forwarding	Virtual Servers, Port Triggering, UPnP, DMZ, FTP Private Port
QoS	WMM, Bandwidth Control
Access Control	IP/MAC/Domain filtering
VPN Pass-through	PPTP, L2TP, IPSEC
Others	DDNS, Static Routing, WOL, Remote Management, Firmware upgrade

Others	
Certification	FCC, CE, KC
Environment	Operating Temperature: 0°C~40°C Storage Temperature: -40°C~70°C Operating Humidity: 10%~90% non-condensing Storage Humidity: 5%~90% non-condensing
Package Contents	1 * WF2780 1 * Quick Install Guide 1 * Power Adapter 1 * Gigabit Cable

Diagram

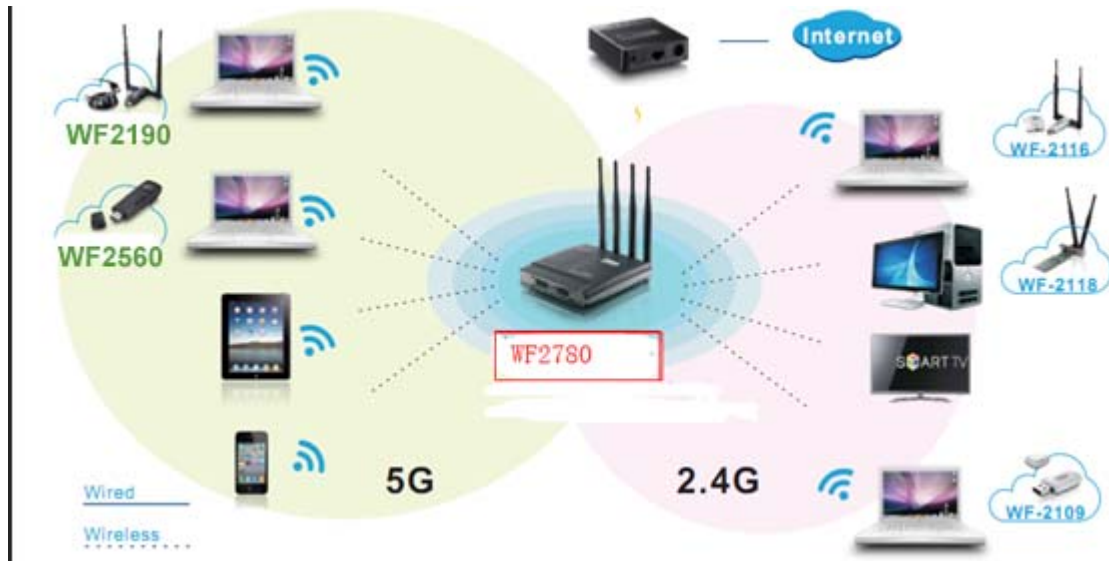

Specifications are subject to change without notice. Netis is a registered trademark of Netis Systems Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. No part of the specifications may be reproduced in any form or by any means or used to make any derivative such as translation, transformation, or adaptation without permission from Netis Systems Co., Ltd.