


Delock PCI Express Card > 1 x internal USB 3.1 Gen 2 key B 20 pin female

Description

This PCI Express card by Delock expands the PC by one internal USB 3.1 key B 20 pin female port. Various cables can be connected to the card to provide up to two USB Type-A interfaces.

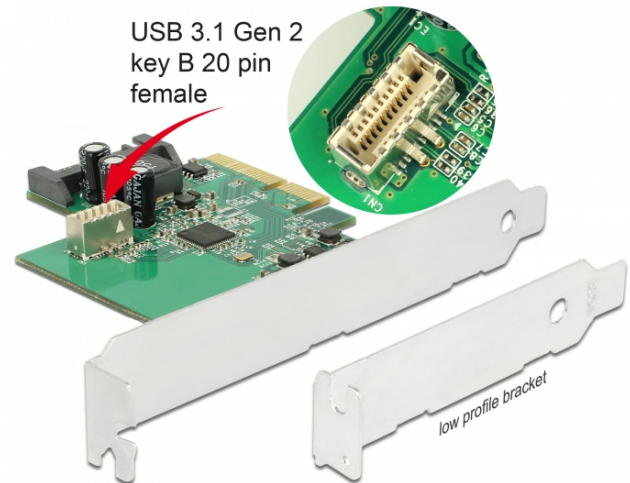

Special features

A data transfer rate of up to 10 Gbps per port is possible, due to the Asmedia chipset ASM2142. If two USB 3.1 devices are connected, they each support 10 Gbps.

Specification

- Connectors:
internal:
1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) key B 20 pin female
1 x SATA 15 pin power plug
1 x PCI Express x4, V3.0
- Chipset: Asmedia ASM2142
- Data transfer rate up to:
SuperSpeed USB 10 Gbps,
SuperSpeed USB 5 Gbps,
Hi-Speed 480 Mbps,
Full-Speed 12 Mbps,
Low-Speed 1.5 Mbps
- Power supply via PCI Express interface or via SATA 15 pin power connector
- Supports eXtensible Host Controller Interface (xHCI) specification 1.1
- Compliant with USB Attached SCSI Protocol (UASP) Rev. 1.0

System requirements

- Windows 8.1/8.1-64/10/10-64, Linux ex Kernel 4.4.x / Kernel 4.9
- PC with one free PCI Express x4 / x8 / x16 / x32 slot
- Optional: power supply with a free SATA power connector

Package content

- PCI Express card
- Low profile bracket
- User manual

Item no. 89801



EAN: 4043619898015

Country of origin: Taiwan, Republic of China

Package: Retail Box



Images

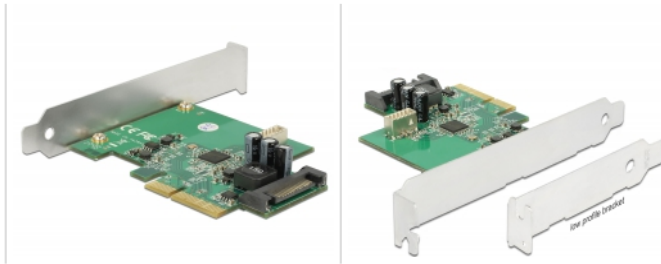

General

Specification:	SuperSpeed USB 10 Gbps (USB 3.1 Gen 2)
Supported operating system:	Linux ex Kernel 4.9 Linux ex Kernel 4.4.x Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit

Interface

Internal:	1 x PCI Express x4, V3.0 1 x SATA 15 pin power plug 1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) key B 20 pin female
-----------	--

Technical characteristics

Chipset:	Asmedia ASM2142
Data transfer rate:	10 Gbps

Physical characteristics

Slot bracket:	low profile standard
---------------	-------------------------