


Type Designation	4706
Designation IEC	LR6
System	Zn-MnO ₂ (Alkaline)
Shelf Life (Coding)	7 years
(In consideration of typical loss o)	
Nominal Voltage [V]	1.5
Typical Capacity C [mAh]	2950 (discharge with high-resistance)
Permissible Temperature Range	- 20 °C ... 50 °C
Weight, approx. [g]	24
Volume [ccm]	7.69

Dimensions [mm]	min:	max:
Ø	13.5	14.5
A	-	50.5
B	49.5	-
C	7.0	-
E	-	0.5
F	-	5.5
G	1.0	-

Discharge Type:
10 S/M, 1 H/D, 7 D/W
Photo Flash

Load: 1000 mA

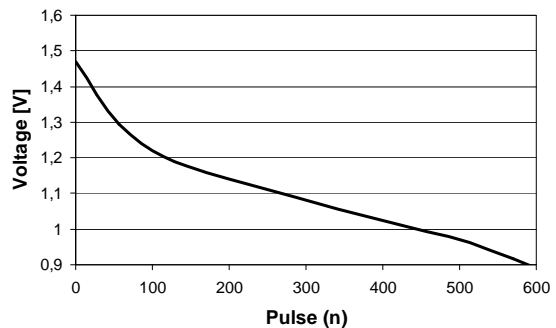

Discharge Type:
2 S/28 S, 5 M/H
Digital Still Camera

Load: 1500 mW / 650 mW

