





SATA Card Reader 3½"

> Compact Flash Typ I / II, IBM Micro Drive

Description

This Card Reader with Hot-Plug function is bootable can be installed either to the backside into a PCI slot or with the enclosed mounting frame into a 3½" front bay of your PC. The device will be connected to the SATA interface to the motherboard and thus reads and writes Compact Flash cards type I / II and IBM Micro Drive.

Images

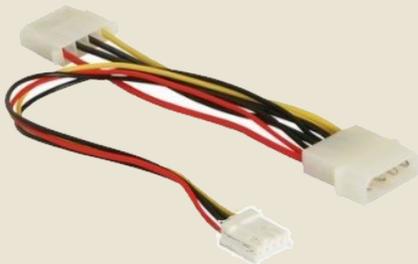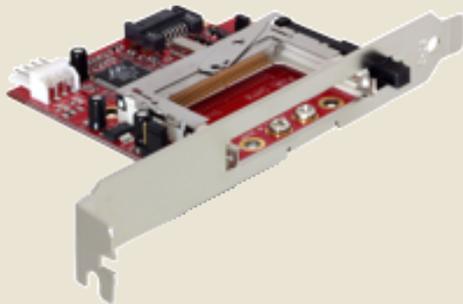

Ref. 91635
EAN 4043619916351

Specification

- Serial ATA 1.0a specification
- Supports Compact Flash card type I / II and IBM Micro Drive
- Supports Compact Flash card with 3.3 V / 5V
- For installation into a 3½" front bay or backside of the PC
- Data transfer rate: SATA 1.5Gbps
- Powered by 4-pin Floppy connector
- LED indicator
- Push button ejector
- Bootable
- Hot-Plug function

System requirement

- Windows, Mac and Linux
- PC with a free 3½" bay or PCI Slot
- SATA port on the motherboard

Package content

- SATA Card reader
- Power cable, screws, mounting frame
- User manual

Package

- Retail Box