



SILVERSTONE®
Designing Inspiration

MILO ML06-E

The Mini-ITX HTPC benchmark

Special Features

- Super small at only 7 liters
- Aluminum front panel with premium styling
- Includes one 120mm fan and support up to two 80mm fans
- Support dual slot low-profile graphics or expansion card
- Support Mini-ITX motherboard and SFX power supply
- Support four 2.5" HDD/SSD



HEADQUARTERS

12F., NO.168, Jiankang Rd., Zhonghe Dist.,
New Taipei City 235, Taiwan R.O.C.
Tel: +886-2-8228-1238
Fax: +886-2-8228-7123

USA

13626 Monte Vista Ave. Unit A, Chino,
CA 91710, USA
Tel: +1-909-465-9596
Fax: +1-909-465-9596

EUROPE

Brandstücken 43, D-22549 Hamburg
Germany
Tel: +49-40-675931-0
Fax: +49-40-675931-66

Model No.: SST-ML06B-E

www.silverstonetek.com

Introduction

The ML06-E is an evolution and variation of the premium Mini-ITX HTPC case, the Milo ML06. With external dimension unchanged at 7 liters, the ML06-E's rearranged internal layout provides a crucial second expansion slot for support of more powerful low-profile discrete graphics card or expansion card that are two slots wide. For users that wish to build with a more robust GPU or tuner card in console/DVR-like form factor to game or for multimedia content recording, the ML06-E is a great starting point.

Feature Photos



Super small at only 7 liters



Aluminum front panel with premium styling



Includes one 120mm fan and support up to two 80mm fans



Support dual slot low-profile graphics or expansion card



Support Mini-ITX motherboard and SFX power supply



Support four 2.5" HDD/SSD

Specifications


Model No.	SST-ML06B-E (black)		Expansion Slot	2
Material	7mm aluminum front panel, 0.8mm steel body		Front I/O Port	USB 3.0 x 2, audio x 1, MIC x 1
Motherboard	Mini-DTX, Mini-ITX		Limitation of CPU cooler	37~70mm (variable based on use of multipurpose bracket)
Drive Bay	Exposed	9.5mm/12.7mm slim slot-loading optical x 1	Power Supply	1 x Optional standard SFX
		(replaceable with 3.5" HDD x 1, 2.5" HDD x 2, or 120mm fan x 1)	Expansion Card	Single or dual slot low profile up to 6.9", width restriction - 2.95"
Cooling System	Internal	2.5" x 4	Dimension	350mm (W) x 99 mm (H) x 205 mm (D), 7 liters
	Side	2 x 80mm fan slot	Extra	Support Kensington lock
	Top	1 x 120mm fan, 1500rpm, 18dBA		

MILO series

The Mini-ITX HTPC benchmark

ML06-E

- 1 Independent PSU intake vent
- 2 Support four 2.5" HDD/SSD
- 3 Support Mini-ITX motherboard and SFX power supply
- 4 Additional full size expansion slot (for extra I/O ports only)
- 5 Support dual slot low-profile graphics or expansion card
- 6 Multipurpose 4-in-1 bracket
- 7 Includes one 120mm fan
- 8 I/O ports include microphone, audio, and two USB 3.0 ports
- 9 Two 80mm fan slots

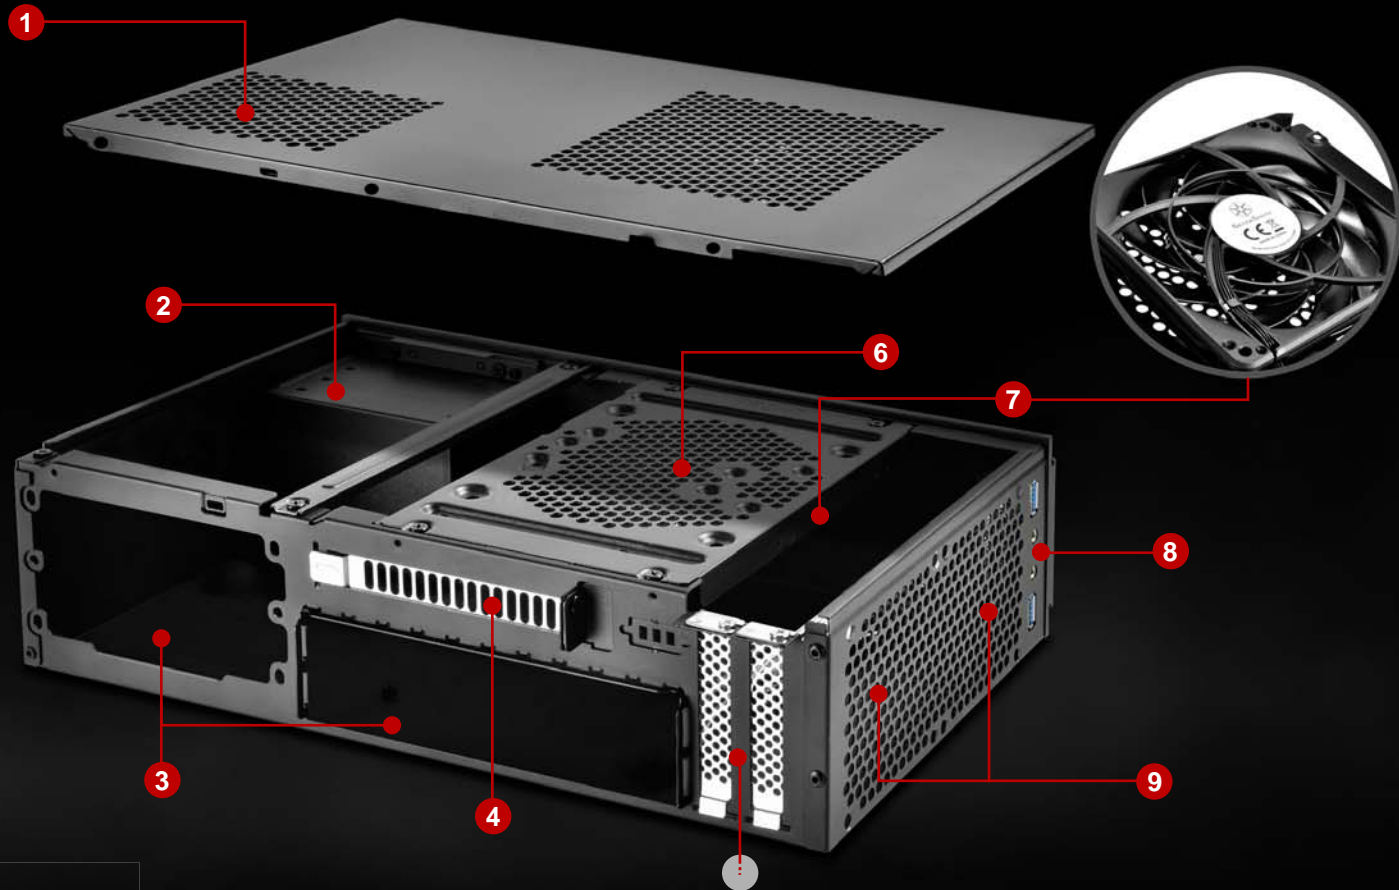


Recommendations



ST45SF / ST45SF-G

Support standard SFX form factor and ATX via included bracket



PP05-E

Short cable set reduces cable clutter in smaller cases & systems



SOB02

Slot loading Blu-ray reader



AP81

Industry leading air channeling fan



CP06-E2

Facilitate cabling and reduce clutter with multiple SATA devices



Sugo Pack

Get a Sugo Pack to conveniently take your ML06-E anywhere you go