




## DIGITUS CAT 5e Modular Coupler, shielded

DN-93513 4016032245179

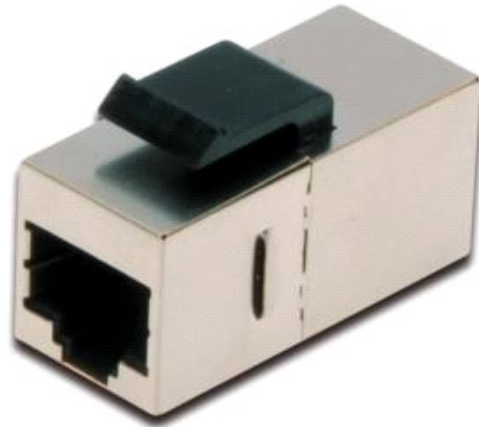

### RJ45 to RJ45 For panel connection

- Suitable for panel connection
- 2 x RJ45 female
- Assignment 1:1
- Material enclosure: ABS non halogen, UL 94 V0
- Material surface: Copper with shining Nickel
- Material PCB: FR4, 1,2mm thickness
- Contacts coating: Nickel, gold plated 0,6µ
- Mating cycles: ≥ 750
- Operating Temperature: -10°C ~+50°C
- Category: CAT 5e



**DIGITUS CAT 5e Modular Coupler, shielded**

DN-93513 4016032245179

→ **Logistics**

	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm <sup>3</sup>
Packaging Unit Carton	1000	9,10	54,00	32,00	35,00	60480,00
Packaging Unit Inside	50	0,46	6,00	18,00	27,00	2916,00
Packaging Unit Single	1	0,01	2,00	6,00	9,00	108,00
Net single without Packaging	1	0,00	3,50	2,00	2,00	14,00

→ **Packaging type**



Country of origin: China