

Cat.6_A STP FLAT Patch Cord



The equip[®] Cat.6_A S/FTP Patch Cord is composed of preeminent materials and fully-examined to fulfill the 10G application. The flat form factor is ideal for saving space and thus more convenient for cabling deployment, avoiding the cumbersome installation.


| Key Feature

- 32AWG
- 600MHz
- Stranded
- PIMF (pairs in metal foil)
- Gold plated pins
- Molded boot
- Cable length printed on plug
- OD: 6.0 x 1.9mm

| Typical Applications

- IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T ; 10GBASE-T
- IEEE 802.5 16 MB; ISDN; TPDDI; ATM

| Structure

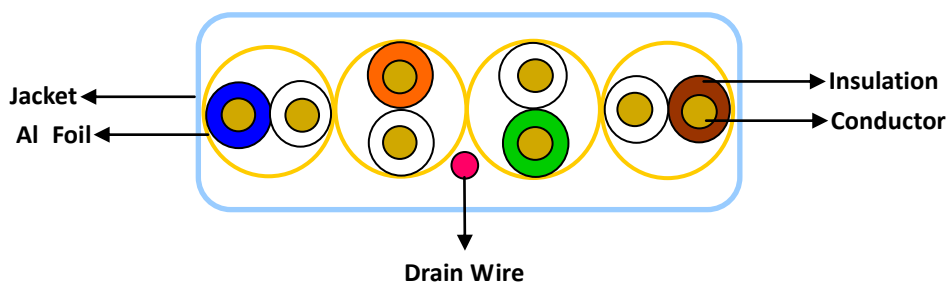



www.equip-info.net

| Specification

Conductor	AMG	32AWG
	Material	BC
	Size	7/0.08 ± 0.008 mm
Insulation	Thickness	0.18 mm
	Material	FM-PE+SKIN
	OD	0.60 ± 0.05mm
Face Inside AL/Mylar	Coverage	100%
	Overlap	25% MIN
Drain	Material	TC
	Size	7/0.08 ± 0.008 mm
	No	4P: 1. Orange* White 2. Green*White 3. Blue*White 4. Brown*White
Jacket	Thickness	0.51mm
	Material	Half Matte PVC Low Toxic
	Colour	Gray (PT427C)
	OD	(1.90 ± 0.15) * (6.0 ± 0.20) mm



www.equip-info.net

| Ordering Information

	white	red	green	yellow
0.5m	607817	607827	607847	607867
1m	607810	607820	607840	607860
2m	607811	607821	607841	607861
3m	607812	607822	607842	607862
5m	607814	607824	607844	607864
10m	607816	607826	607846	607866

Packing: equip zip bag

