


ROHS-COMPLIANT

USB 3.0 A/M 9PIN
INS:BLUE(PT 300C)

USB 3.0 B/M 9PIN
INS:BLUE(PT 300C)

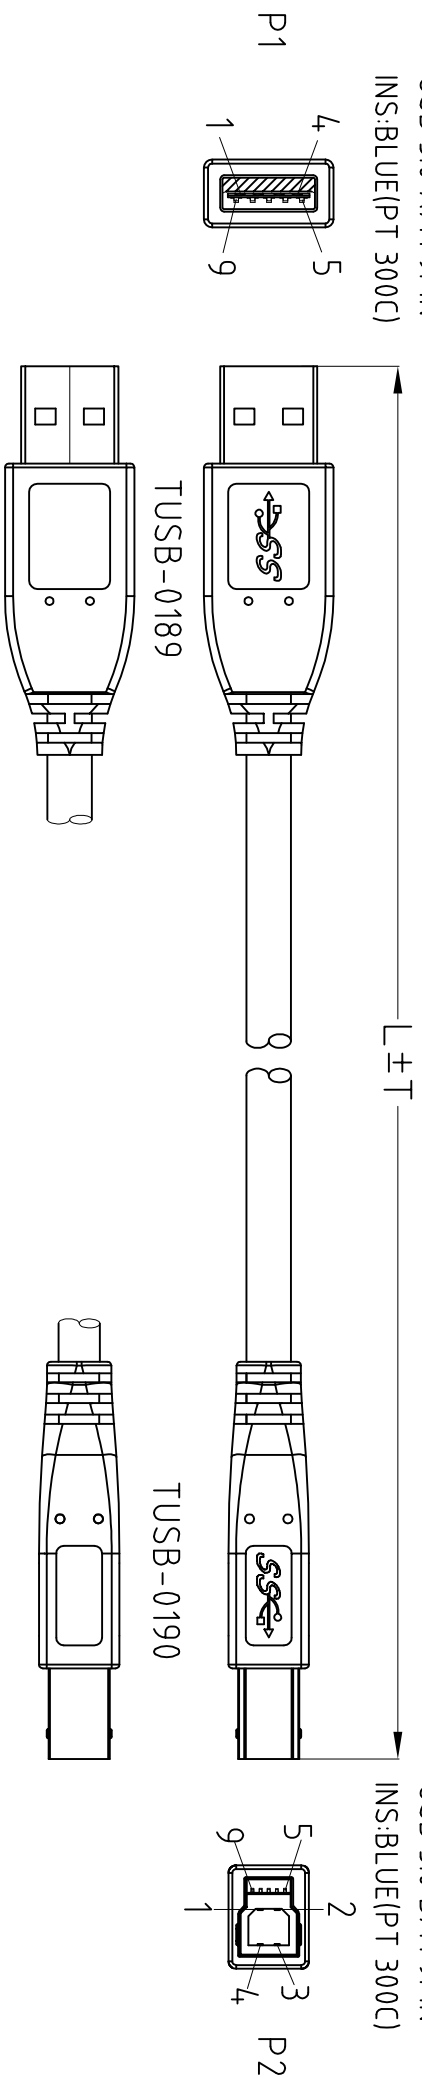

NOTE:

- 1.CABLE: UL-2725 [#28(7/0.127 T.C)×1P INS:Foam-PE+D.W(7/0.127 T.C)
+AL/MY+Hot-melt-Mylar]×2C+#28(7/0.127 T.C)×1P INS:Polyolefin
+#28(7/0.127 T.C)×2C INS:Polyolefin+AL/MY+B.D(85%)
PVC JACKET; OD:5.2±0.15mm COLOR:BLACK(NK-K01) REV 3.0.
- 2.CONNECTOR:
P1: USB 3.0 A TYPE MALE 9PIN CONTACT:30U",SHELL:NI-PLATED.
P2 :USB 3.0 B TYPE MALE 9PIN CONTACT:30U",SHELL:NI-PLATED.
- 3.HOOD:MOLDED TYPE,PVC 45P, COLOR:BLACK(NK-K01).
- 4.ELECTRICAL TEST:

- (1)100% OPEN SHORT & MIS WIRE TEST.
 - (2)CONTACT RESISTANCE 3 ohm Max .
 - (3)INSULATION RESISTANCE 10M ohm Min .
 - (4)HI-POT DC300V
- 5.PACKING:EACH PC / POLY BAG.

PIN OUT	
P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
SHELL	SHELL

Tolerance	Inch	M/M
X	.015	.30
XX	.010	.10
XXX	.005	.05

Title	
USB 3.0 A/M - B/M CABLE	

DWG	L(mm)	T(mm)
170-3450-3	3000	30
170-3450-2	2000	30
170-3450-1	1000	20

Draw	FANNIE 11/12/09	Customer P/N
Check		App'd
Engr		Scale NONE
		Units M/M
		REF: I
		Sheet: 1/1

LTR	REV.	DESCRIPTION	DATE