


ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE

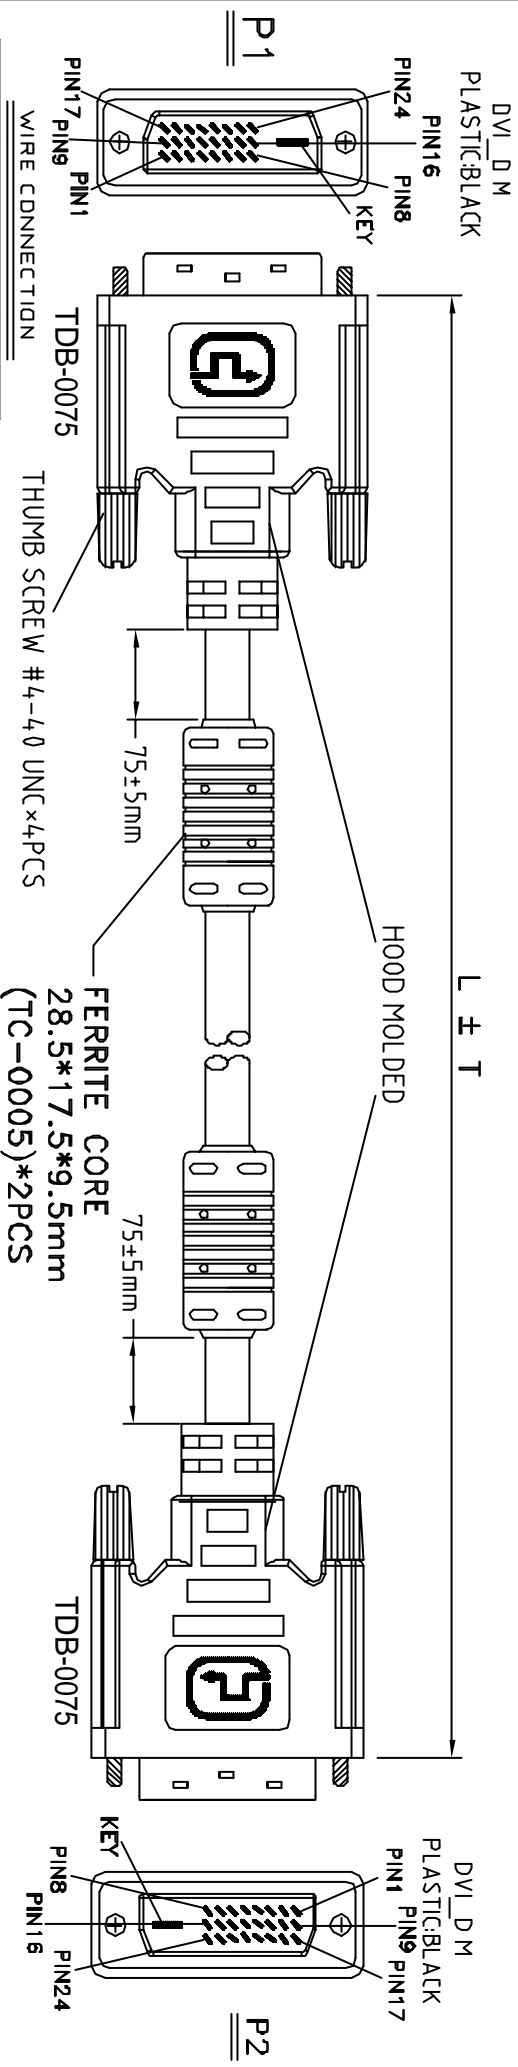

REMARK:

1. CABLE:[28AWG17/0.127]×1P+DRAIN WIRE+AL/MYLAR]×7C+28AWG17/0.127]T.C×1P+28AWG17/0.127]×3C +AL/MYLAR+BRAID SHIELDS+JACKET:PVC DD: 8.6±0.15mm UL20276 APPROVED. COLOR:BLACKINK-K01

2.CONNECTOR:

P1&P2:DVI_D 25P: 24P+KEY MALE, GOLD FLASH CONTACT, NICKEL PLATED SHELL.

3.SHIELD: P1&P2 COPPER FOIL 360° SOLDERED

T0 CONNECTOR SHELL & CABLE SHIELDING

4.HOOD:

P1&P2:MOLDED TYPE, PVC 45P, COLOR:BLACKINK-K011

5.TEST REQUEST:

- 1|1 100% SHORT OPEN & MIS WIRE TEST.
- 2| CONTACT RESISTANCE 3 OHMS MAX.
- 3| INSULATION RESISTANCE 10M OHMS MIN.
- 4| HI-POT VOLTAGE: 300V DC.
- 6.PACKING: <1>-EACH PC / POLYBAG + EAN CODE LABEL & ROHS LABEL
<2>-EACH CARTON / ROHS LABEL L×W=35×22mm|

P1	WIRE COLOR	P2
1		1
2		2
3		3
3		3
4		4
5		5
6		6
7		7
9		9
10		10
11		11
11		11
12		12
13		13
14		14
15		15
16		16
17		17
18		18
19		19
19		19
20		20
21		21
22		22
23		23
24		24
SHELL	BRAID SHIELDS	SHELL

200-0482-3	CD0003	5000	50	4260113560112
200-0482-2	CD0002	3000	30	4260113560105
200-0482-1	CD0001	2000	30	4260113560099
DWG	P/N	L [mm]	T [mm]	EAN CODE

Tolerance	h/h	M/M
.X	.15	.31
.XX	.11	.10
.XXX	.115	.15

2DIRECT GMBH
 Title: DVI_D - DVI_D DUAL LINK CABLE
 Customer P/N:

Drawn	Customer P/N		
Check	App'd	Customer E-DIR	
Engr	Scale	Units	m/m Third Angle Projection
	NONE	Units	
Dwg No.	200-0482	REV:A	Sheet 1/2