



# ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE
3*2	D	ECR #080416-3 ADD LENGTH,EDIT LABEL	04/16/08'
4*4	E	ECR #101230-35 EDIT LABEL,POLYBAG	01/03/11'

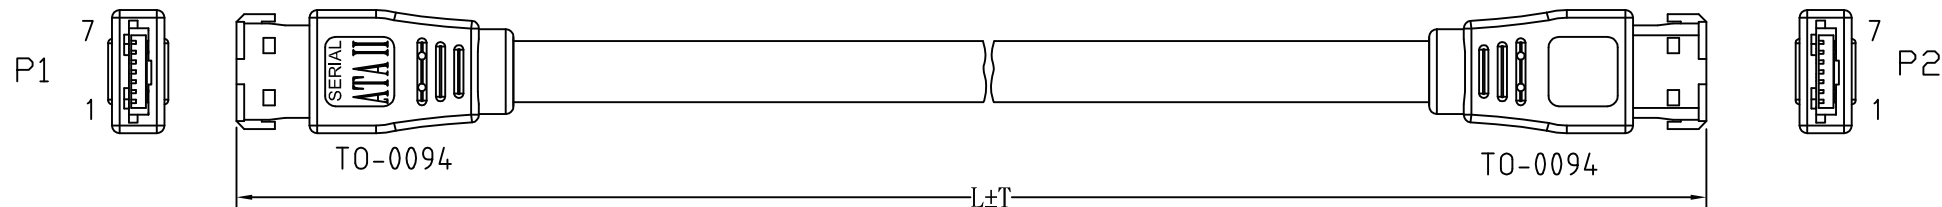

**NOTE:**

1. CABLE: UL2725 [26AWG(1/0.404)\*2F INS: HD-PE ID: 1.3\*2.7+DRAIN WIRE  
28AWG(1/0.32)\*2C+AL/MY]\*2C INNER JACKET: PVC OD: 7.3\*2.1mm  
+AL/MY+BRAID(16/10/0.1)PVC JACKET, COLOR: BLACK(NK-K01),  
OD: 9.0\*4.0mm, IMPEDANCE: 100 OHM.

**2. CONNECTOR:**

P1&P2: SATA II 7P RIVETING TYPE CRIMP TYPE PBT BLACK G/F W/METAL SHELL

3. SHIELD: COPPER-FOIL

4. HOOD: MOLDED TYPE, PVC 45P, COLOR: BLACK(NK-K01)


**5. TEST REQUEST:**

100% OPEN SHORT MIS WIRE TEST  
CONTACT RESISTANCE 3 ohm MAX.  
INSULATION RESISTANCE 10M ohm MIN.

**6. PACKING: SEE P-0210 PACKING DRAWING**

△△ <1>EACH PC / POLYBAG + EAN CODE LABEL  
<2>EACH CARTON / ROHS LABEL(L\*W=35\*22mm)


PIN ASSIGNMENT

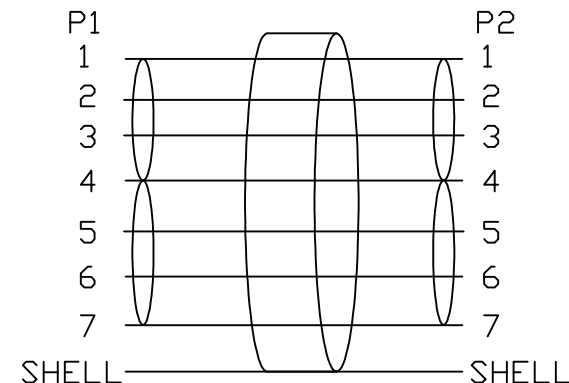



△	140-1464-3	CS0011	1500	30	4260113567104
	140-1464-2	CS0010	750	10	4260113567111
	140-1464-1	CS0004	1000	20	4260113564127
	DWG	P/N	L(mm)	T(mm)	EAN CODE


Tolerance Inch M/M			2Direct GmbH			
.X	.015	.30	Title			
.XX	.010	.10	SERIAL ATA II SINGAL EXTERNAL CABLE			
.XXX	.005	.05	Customer P/N:			
Draw FANNIE 01/03/11'			App'd		Customer:	
Check			Scale	NONE	Units	m/m
Engr			Third Angle Projection			
			Dwg No. 140-1464		REV: E	Sheet 1/2

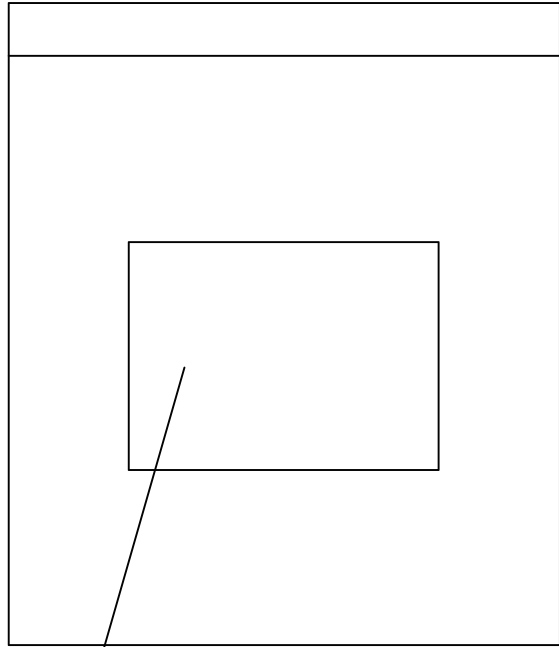POLYBAG 




LABEL POSITION IN THE MIDDLE


LTR	REV.	DESCRIPTION	DATE
 *2	D	ECR #080416-3 ADD LENGTH,EDIT LABEL	04/16/08'
 *4	E	ECR #101230-35 EDIT LABEL,POLYBAG	01/03/11'

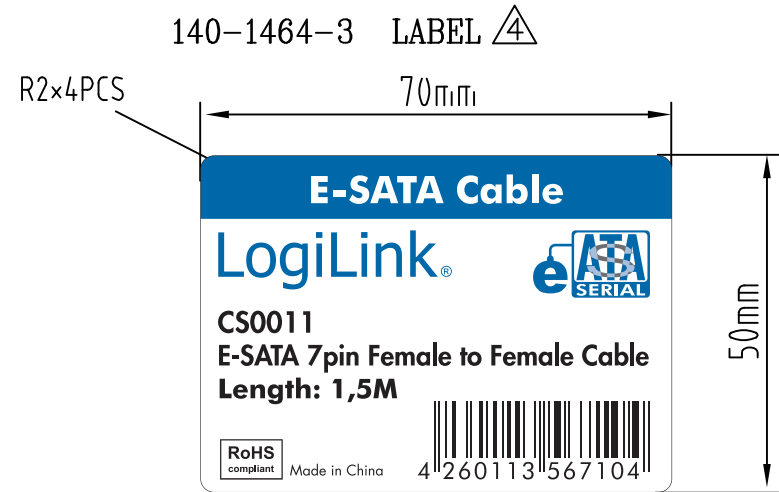

LABEL: PANTONE 2945C

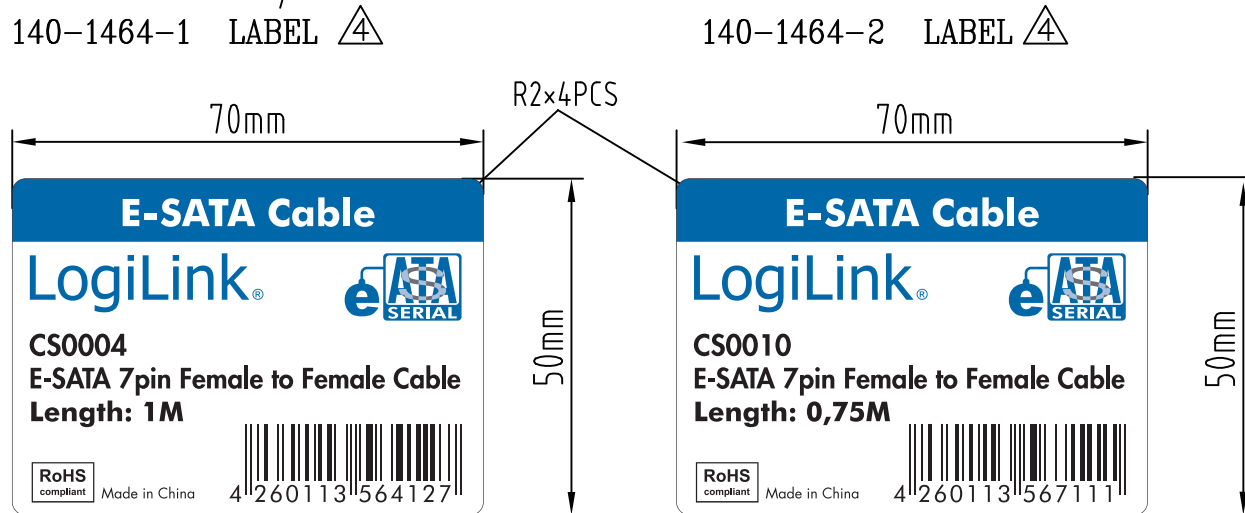

LABEL: PANTONE 2945C

Tolerance Inch M/M			2Direct GmbH		
.X	.015	.30	Title		
.XX	.010	.10	SERIAL ATA II SINGAL EXTERNAL CABLE		
.XXX	.005	.05	Customer P/N:		
Draw			App'd		
FANNIE 01/03/11'			Customer:		
Check			Scale	Units	Third Angle Projection
Engr			NONE	m/m	
			Dwg No. 140-1464	REV: E	Sheet 2/2