



Mini-DisplayPort to VGA Adapter

Mini-DisplayPort Male to VGA Female

Easily connects a mini-DisplayPort source with VGA cable.


MANHATTAN® Mini-DisplayPort to VGA Adapters help establish a fast and convenient connection between a media source equipped with a mini-DisplayPort and a VGA display cable. Ideal for presentations, retail displays and other uses, this single-cable solution keeps installations and workplaces neat and organized without an external power supply or complicated configuration. Nickel-plated contacts and full shielding help MANHATTAN Mini-DisplayPort Adapters provide clear and stable video transmissions in home and office multimedia applications. Durable white PVC jackets and molded boots with strain relief complement Macintosh systems and help ensure connections remain uninterrupted and steady.

Lifetime Warranty

Strict manufacturing standards ensure the highest quality in all MANHATTAN products. All items carry a full Lifetime Warranty — the strongest quality commitment anyone can make.


Model
322508



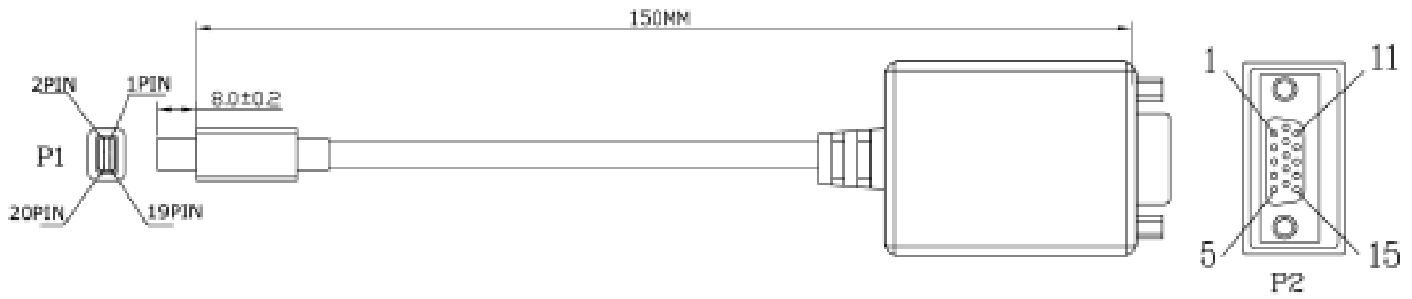

ELECTRICAL TEST:

1. 100% OPEN SHORT SHORT & MIS WIRE TEST
2. CONTACT RESISTANCE: 1 OHM(MAX)
3. INSULATION RESISTANCE: 10M OHM(MIN)
4. HI-POT TEST: DC 300V/10ms

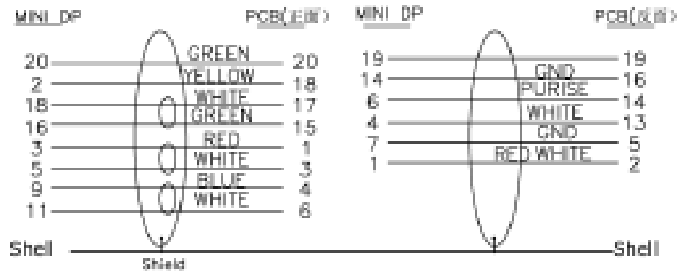

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MANHATTAN AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF MANHATTAN.

REV.	TOLERANCE INCHES	MM	DESCRIPTION	DATE
6	.015	.30	MINI DISPLAY PORT M ABS BOTTOM SHELL	
5	.010	.10	MINI DISPLAY PORT M ABS TOP SHELL	
4	.005	.05	HDB15P Feale+POB+SMT Insulation:Black,Shell NICKEL WITH NUT	
3			MINI DISPLAY PORT M NICKEL PLATED	
2			20PIN PCB BOARD	
1			UL20276(32AWG*1PR+EAM)*S #32AWG*SC+AEB(AL85%) OD:4.8MM WHITE JACKET	

NO	DESCRIPTION	Q'TY	UNIT
6	MINI DISPLAY PORT M ABS BOTTOM SHELL	1	PCS
5	MINI DISPLAY PORT M ABS TOP SHELL	1	PCS
4	HDB15P Feale+POB+SMT Insulation:Black,Shell NICKEL WITH NUT	1	PCS
3	MINI DISPLAY PORT M NICKEL PLATED	1	PCS
2	20PIN PCB BOARD	1	PCS
1	UL20276(32AWG*1PR+EAM)*S #32AWG*SC+AEB(AL85%) OD:4.8MM WHITE JACKET	L	M

REV.	TOLERANCE INCHES	MM	DESCRIPTION	DATE
6	.015	.30	MINI DISPLAY PORT M ABS BOTTOM SHELL	
5	.010	.10	MINI DISPLAY PORT M ABS TOP SHELL	
4	.005	.05	HDB15P Feale+POB+SMT Insulation:Black,Shell NICKEL WITH NUT	
3			MINI DISPLAY PORT M NICKEL PLATED	
2			20PIN PCB BOARD	
1			UL20276(32AWG*1PR+EAM)*S #32AWG*SC+AEB(AL85%) OD:4.8MM WHITE JACKET	

REV.	TOLERANCE INCHES	MM	DESCRIPTION	DATE
6	.015	.30	MINI DISPLAY PORT M ABS BOTTOM SHELL	
5	.010	.10	MINI DISPLAY PORT M ABS TOP SHELL	
4	.005	.05	HDB15P Feale+POB+SMT Insulation:Black,Shell NICKEL WITH NUT	
3			MINI DISPLAY PORT M NICKEL PLATED	
2			20PIN PCB BOARD	
1			UL20276(32AWG*1PR+EAM)*S #32AWG*SC+AEB(AL85%) OD:4.8MM WHITE JACKET	

Features

- Connects a mini-DisplayPort source with a VGA display cable
- Delivers a single, high-quality signal to VGA display – ideal for Mac computers
- Integrated DAC for analog VGA signal output
- Fully shielded to reduce EMI and other interference sources
- Molded PVC boot and strain relief
- Lifetime Warranty

Specifications

STANDARDS/CERTIFICATIONS

- UL
- DisplayPort 1.1

CONNECTORS

- (1) mini-DisplayPort 20-pin male
- (1) VGA 15-pin female
- Nickel plated
- Molded PVC boot

CABLE

- 32 AWG connectors
- Shielding: Mylar and aluminum

- Withstanding voltage: 300 V DC
- Insulation resistance: 5 MOhms
- Conductive resistance: 10 Ohms
- Thermal plastic casing

DIMENSIONS

- Length: 17 cm (6.7 in.)

PACKAGE CONTENTS

- Mini-DisplayPort to VGA Adapter

For more information on MANHATTAN products, consult your local dealer or visit www.manhattan-products.com.



Copyright © MANHATTAN

