



VGA Monitor Cable

HD15 Male to HD15 Male, White

Reliable connections for superior signal quality.

MANHATTAN® VGA Cables easily connect a monitor with a desktop or notebook computer. Ideal for use with video splitters, KVM switches and any HD15-equipped display, computer or device, MANHATTAN VGA Cables are engineered and constructed of quality materials to deliver dependable transmissions in video applications. Full foil shielding, molded boots with strain relief and mini-coax (RGB) and paired-video-wire construction help provide maximum conductivity and clear, crisp images with reduced EMI interference and distortion over extended distances.

Model	Length
300735	1.8 m (6 ft.)
300926	3.0 m (10 ft.)
309318	4.5 m (15 ft.)
300902	7.5 m (25 ft.)
308823	10 m (33 ft.)


Lifetime Warranty

Strict manufacturing standards ensure the highest quality in all MANHATTAN products. All items carry a full Lifetime Warranty — the strongest quality commitment anyone can make.

Model
308823
300735
300902
300926
309318



REV.	DESCRIPTION	ENG.	APPROVAL

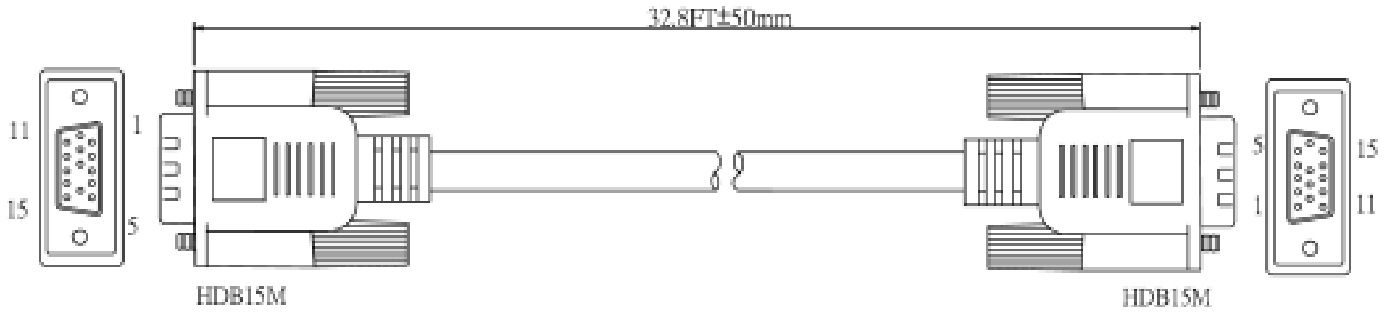

NOTE:

1. CABLE: 30#,NON-UL,AL-FOIL,14C+1,BEIGE COLOR,OD=5.0mm,PVC JACKET.
2. LENGTH: 32.8FT
3. CONNECTOR: HDB15M*2PCS (9 PIN OUT,BLACK INSULATOR).
4. MLOD: APPLE MOLDING

5. CONTACTS:

HDB15M	1	2	3	4	5	6	7	8	10	11	12	13	14	15	64
HDB15M	1	2	3	4	5	6	7	8	10	11	12	13	14	15	64

6. OPEN/SHORT: 100% TEST.
INSULATION: 5M.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MANHATTAN AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF MANHATTAN.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, ANGULAR TOLERANCE -1°

TOLERANCES (INCH)	TOLERANCES (MM)
x .000"	x .010mm
x .001"	x .020mm
x .005"	x .050mm
x .010"	x .100mm



TITLE	APP'D	Date	
	Check	2009.09.18	
CUSTOMER	Drawer	ZXW	
CUSTOMER P/N	Unit	mm	Projection
KT P/N	Scale	1:1	Size
DWG. NO.	Sheet	1 of	REV. A

Features

- HD15 male to HD15 male
- Connects VGA source to VGA display
- Fully shielded to reduce EMI and other interference sources
- Molded PVC boot and strain relief
- Lifetime Warranty

Specifications

CONTACTS

- (2) 15-pin HD male connections
- Nickel-plated contacts
- Molded PVC boot
- Built-in strain relief
- Mini-coax (RGB) and paired video wire

CABLE

- 30 AWG cable
- Withstanding voltage: 300 V DC
- Thermal plastic casing

PACKAGE CONTENTS

- VGA Monitor Cable

DIMENSIONS

- Overall diameter: 5.0 mm (0.19 in.)

For more information on MANHATTAN products, consult your local dealer or visit www.manhattan-products.com.



Copyright © MANHATTAN

