



Mini-DisplayPort Monitor Cable

Mini-DisplayPort, Male to Male, White

High-definition performance for personal computing.

MANHATTAN® Mini-DisplayPort Cables provide a single-cable solution that delivers both high-definition digital audio and video signals between desktop and notebook computers and an output device. With 10.8 Gbps bandwidth (1080 Mbps), DeepColor and 24-bit, eight-channel uncompressed audio capability, the 20-pin connector is small, compact and ideal for use with mini-DisplayPort-equipped devices, flat-panel displays, slim-profile devices and many future consumer electronics. Full foil-and-braided shielding, molded boots with strain relief, protective PVC jackets and nickel-plated connections help MANHATTAN mini-DisplayPort Cables provide maximum conductivity and clear, crisp signal transmissions with reduced EMI interference and distortion.


Model	Length
324557	1.0 m (3.3 ft.)
324632	2.0 m (6.6 ft.)
324670	3.0 m (10 ft.)

Lifetime Warranty

Strict manufacturing standards ensure the highest quality in all MANHATTAN products. All items carry a full Lifetime Warranty — the strongest quality commitment anyone can make.

Model
324557
324632
324670



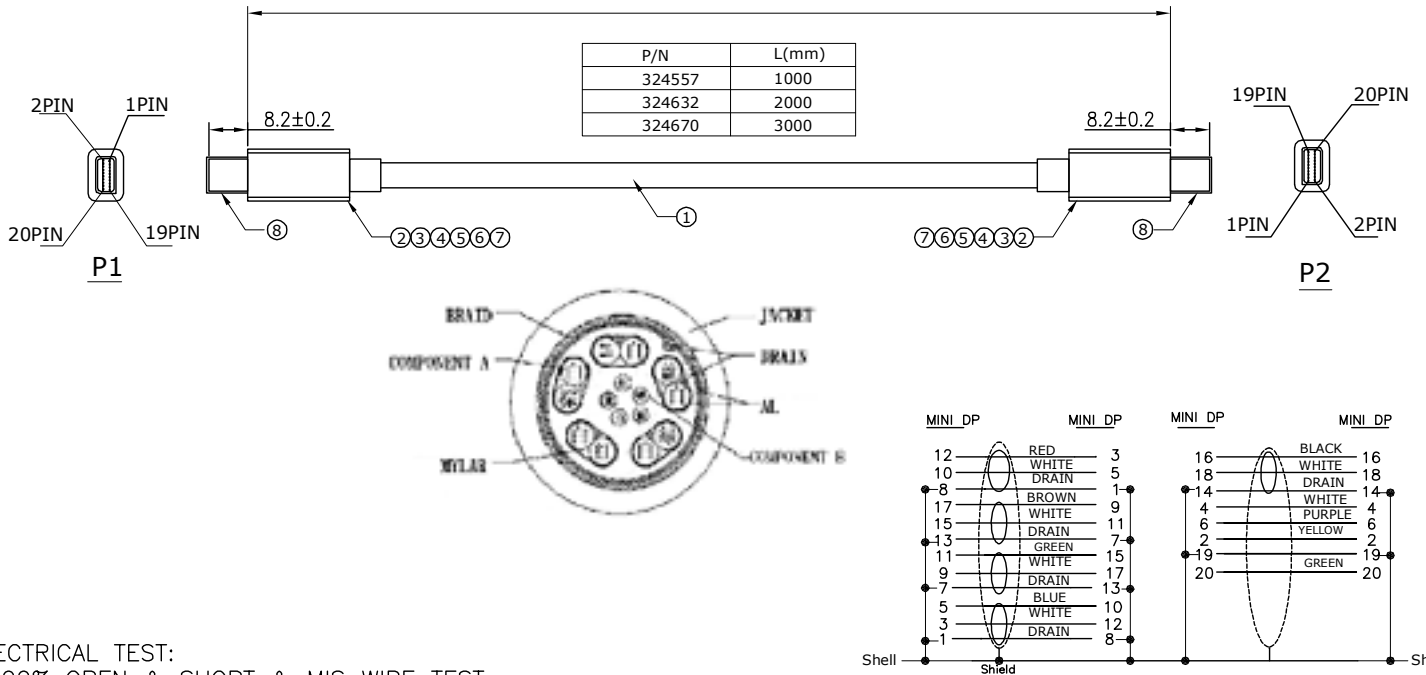

ELECTRICAL TEST:

- 100% OPEN & SHORT & MIS WIRE TEST
- CONTACT RESISTANCE: 2 OHM(MAX)
- INSULATION RESISTANCE: 10M OHM(MIN)
- HI-POT TEST: DC 300V/10ms

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MANHATTAN AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF MANHATTAN.

REV.	DESCRIPTION		DATE	
8	A6-0000157	Mini DisplayPort TRANSPARENT DUST COVER	2	pcs
7	A6-R104240	mini DisplayPort M ABS UP Apple WHITE ,NO MARK	2	pcs
6	A6-R104239	mini DisplayPort M ABS Down Apple WHITE ,NO MARK	2	pcs
5	A5-R047107	45P Apple WHITE PVC	8	g
4	A6-R021133	mini Display Port M NICKET PLATED	2	pcs
3	A6-R021212	mini Display Port M ,GOLD PLATED	2	pcs
2	A2-R021292	mini DisplayPort M INSULATION:WHITE,SHELL GOLD,PIN GOLD	2	pcs
1	A4-R001678	Display Port UL20276 [32AWG(7/0.08TC)*1PR+EAM]*5+32AWG(7/0.08TC)*5C +AEB 85% (16/7/0.12AL) OD:4.8MM Apple White	1	M
NO	CELINK P/N	DESCRIPTION	Q'TY	UNIT

TOLERANCE		MANHATTAN	
INCHES	M/M	TITLE: MINI DP M TO MINI DP M GOLD PLATED	
.X	.015	CUSTOMER :	
.XX	.010	CUSTOMER P/N :	
.XXX	.005	SCALE	NONE
DRAWN BY		UNIT	MM
CHECK BY		DATE	09.12.11
APPD BY		DRAWING NO.:	REV. A
			1/3

Features

- Provides mini-DisplayPort 20-pin male to mini-DisplayPort 20-pin male connections
- Delivers high-bandwidth, digital audio/visual signals from Mini-DisplayPort enabled devices to Mini-DisplayPort displays – up to 1080p resolution
- Supports HDMI and DVI signal pass-through
- Fully shielded to reduce EMI and other interference sources
- Plug and Play for box-to-box applications
- Molded PVC boot and strain relief
- Lifetime Warranty

Specifications

STANDARDS AND CERTIFICATIONS

- UL 20276

CONNECTORS

- (2) mini-DisplayPort 20-pin male
- Gold-plated contacts
- Molded PVC
- Built-in strain relief

CABLE

- 32 AWG conductors
- Withstanding voltage: 300 V DC
- Thermal plastic casing
- Shielded

GENERAL

- Meets or exceeds existing DisplayPort 1.1 standards
- Supports 10.8 Gbps data rate, 2560 x 1600 resolution (WQXGA) and HDCP

PACKAGE CONTENTS

- Mini-DisplayPort Monitor Cable

For more information on MANHATTAN products, consult your local dealer or visit www.manhattan-products.com.



Copyright © MANHATTAN

