

PUMP ENERGY TO
PORTABLE DEVICES



Space-saving
M.2 SATA form factor
for ultra-compact computing devices




Solid State Drive | M.2 SSDs (3D NAND)

Utilizing the SATA III 6Gb/s interface, Transcend's ultracompact M.2 SSDs are well-suited to address the high-performance needs and strict size limitations of small form factor devices. By using only high-quality flash chips and enhanced firmware algorithms, Transcend's M.2 SSDs deliver peerless reliability.



Built-in SLC caching technology

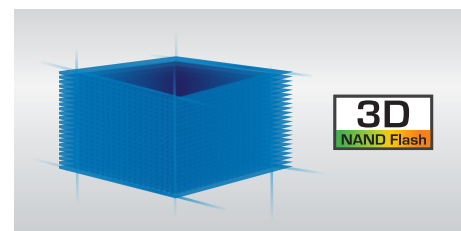

3D NAND flash memory

- SATA III 6Gb/s interface and SLC caching technology for exceptional transfer speeds
- Engineered with a RAID engine and LDPC (Low-Density Parity Check) coding to ensure data integrity
- Supports Device Sleep Mode (DevSleep) to prolong notebook battery life by intelligently shutting down SATA interface when not in use
- DDR3 DRAM cache (M.2 SSD 430S and M.2 SSD 830S only)
- Five-year Limited Warranty for M.2 SSD 430S and M.2 SSD 830S;
Three-year Limited Warranty for M.2 SSD 420S and M.2 SSD 820S

	M.2 SSD 420S	M.2 SSD 430S	M.2 SSD 820S	M.2 SSD 830S
Interface	SATA III 6Gb/s	SATA III 6Gb/s	SATA III 6Gb/s	SATA III 6Gb/s
Storage Media	3D NAND Flash Memory	3D NAND Flash Memory	3D NAND Flash Memory	3D NAND Flash Memory
Capacity	120GB~240GB	128GB~512GB	120GB~480GB	128GB~1TB
Form Factor	M.2 Type 2242	M.2 Type 2242	M.2 Type 2280	M.2 Type 2280
DDR3 DRAM cache	-	●	-	●
Performance*				
Seq. read/write	520MB/s, 480MB/s	560MB/s, 500MB/s	540MB/s, 500MB/s	560MB/s, 520MB/s
Max. 4K random read	40,000 IOPS	80,000 IOPS	50,000 IOPS	85,000 IOPS
Max. 4K random write	75,000 IOPS	85,000 IOPS	75,000 IOPS	85,000 IOPS

*Speed may vary due to host hardware, software, usage and storage capacity.