

## CyberPower PR3000ERTXL2U UPS Line-interactive 3 kVA 3000 W 8 AC-uitgang(en)

**Merk :** CyberPower

**Artikelcode:** PR3000ERTXL2U

**Productnaam :** PR3000ERTXL2U




CyberPower PR3000ERTXL2U. UPS-topologie: Line-interactive, Output power capacity: 3 kVA, Uitgangsvermogen: 3000 W. Stopcontacttypes: C13 stekker, C19 stekker, Stekker: C20 stekker, Aantal AC uitgangen: 8 AC-uitgang(en). Batterijtechnologie: Sealed Lead Acid (VRLA), Typische backup tijd op volledige lading: 1,7 min, Typische backup tijd op halve lading: 7,1 min. Vormfactor: Rackmontage/toren, Kleur van het product: Zwart, Materiaal behuizing: Metaal. Certificaten van naleving: RoHS, Certificering: CE, FCC Class A, UL, CISPR 22 Class A, IEC62040-2, RCM, VCCI, EN 61000-3-2




Features		Battery	
UPS topology *	Line-Interactive	Number of batteries supported	4
Output power capacity *	3 kVA	Typical backup time at full load	1.7 min
Output power *	3000 W	Typical backup time at half load	7.1 min
Waveform *	Pure sine	Battery recharge time	3 h
Input operation voltage (min) *	159 V	Hot-swap battery	✓
Input operation voltage (max) *	288 V	Replacement battery cartridge	RBP0129
Input frequency *	50/60 Hz		
Output operation voltage (min)	220 V	<b>Design</b>	
Output operation voltage (max)	240 V	Form factor *	Rackmount/Tower
Output frequency	50/60 Hz	Housing material	Metal
Automatic Voltage Regulation (AVR)	✓	Rack capacity	2U
Maximum current	16 A	Cable length	2.4 m
Surge energy rating	2430 J	Product colour *	Black
Transfer time (Line Mode to Battery Mode)	4 ms	Display type	LCD
Response time	4 ms	LED indicators	Error, Operation
Number of input phases	1	<b>Operational conditions</b>	
Power factor	1	Operating temperature (T-T)	0 - 40 °C
Power Factor Correction (PFC) type	Active	Storage temperature (T-T)	-15 - 45 °C
EMI/RFI noise filtering	✓	Operating relative humidity (H-H)	0 - 95%
Surge protection	✓	Storage relative humidity (H-H)	0 - 95%
Power protection features	Overload, Short circuit	Operating altitude	0 - 3000 m
Audible alarm(s)	✓	Non-operating altitude	0 - 15000 m
Web-based management	✓	<b>Certificates</b>	
Management protocols	SNMP/HTTP	Compliance certificates	RoHS
Audible alarm modes	Alarm when on battery, Low battery alarm, Overload alarm	Certification	CE, FCC Class A, UL, CISPR 22 Class A, IEC62040-2, RCM, VCCI, EN 61000-3-2
Socket circuit breaker	✓	<b>Sustainability</b>	

Ports & interfaces		Sustainability	
AC outlet types	C13 coupler, C19 coupler	Sustainability certificates	ENERGY STAR
Power plug	C20 coupler	Weight & dimensions	
AC outlets quantity	8 AC outlet(s)	Width	433 mm
USB port	✓	Depth	500 mm
Serial interface	✓	Height	86.5 mm
Serial interface type	RS-232	Weight	32.8 kg
Ethernet LAN (RJ-45) ports	2	Packaging data	
Cabling technology	10/100/1000Base-T(X)	Package width	560 mm
Emergency Power Off (EPO) connector	✓	Package depth	620 mm
Battery		Package height	275 mm
Battery technology	Sealed Lead Acid (VRLA)	Package weight	41 kg
		Package volume	40800 cm <sup>3</sup>
		Logistics data	
		Harmonized System (HS) code	8504408590
		Country of origin	China
		Other features	
		Bypass	GreenPower UPS

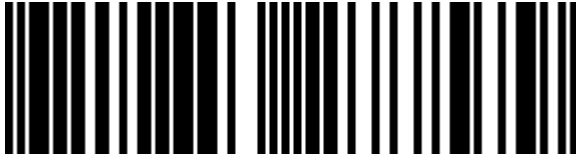

4712856277579

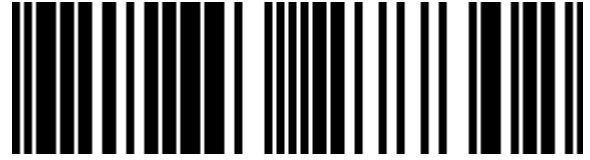

4712856277302

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.