



APC SMV1000CAI Noodstroomvoeding - 6x C13, USB, 1000VA


Merk : APC

Artikelcode: SMV1000CAI

Productnaam : SMV1000CAI Noodstroomvoeding - 6x C13, USB, 1000VA

APC SMV1000CAI Noodstroomvoeding - 6x C13, USB, 1000VA

APC SMV1000CAI Noodstroomvoeding - 6x C13, USB, 1000VA. UPS-topologie: Line-interactive, Output power capacity: 1 kVA, Uitgangsvermogen: 700 W. Stopcontacttypes: C13 stekker, Stekker: C14 stekker, Aantal AC uitgangen: 6 AC-uitgang(en). Batterijtechnologie: Sealed Lead Acid (VRLA), Acculevensduur (max): 5 jaar, Accu/Batterij oplaadtijd: 4 uur. Vormfactor: Tower, Kleur van het product: Zwart, Grijs, Type beeldscherm: LCD. Breedte: 160 mm, Diepte: 410 mm, Hoogte: 220 mm

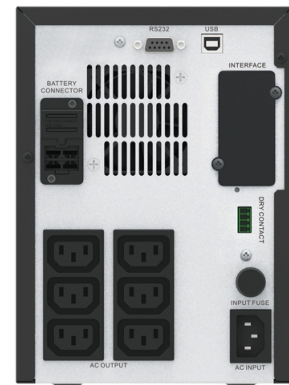


Kenmerken		Design	
UPS-topologie *	Line-interactive	Kleur van het product *	Zwart, Grijs
Output power capacity *	1 kVA	Type beeldscherm	LCD
Uitgangsvermogen *	700 W	LED-indicatoren	✓
Golfvorm *	Sinus	Certificering	CE
Ingang operation voltage (min) *	160 V	Eisen aan de omgeving	
Ingang operation voltage (max) *	295 V	Bedrijfstemperatuur (T-T)	0 - 40 °C
Frequentie *	45/65 Hz	Temperatuur bij opslag	-10 - 40 °C
Output frequentie	50/60 Hz	Relatieve vochtigheid in bedrijf (V-V)	0 - 95 procent
Automatic Voltage Regulation (AVR)	✓	Luchtvochtigheid bij opslag	0 - 95 procent
Responstijd	2 ms	Hoogte, in bedrijf	0 - 3000 m
Efficiëntie	97,9 procent	Hoogte bij opslag	0 - 3000 m
Crest factor	3:1	Technische details	
Geluidsalarm(en)	✓	Duurzaamheidscertificaten	RoHS
Hoorbare alarmstanden	Alarm bij werking op batterij, Alarm bij laag batterijniveau, Alarm bij overbelasting	Gewicht en omvang	
Poorten & interfaces		Breedte	160 mm
Stopcontacttypes	C13 stekker	Diepte	410 mm
Stekker	C14 stekker	Hoogte	220 mm
Aantal AC uitgangen	6 AC-uitgang(en)	Gewicht	13,6 kg
USB-poort	✓	Batterijbreedte	27,2 cm
Aantal USB 2.0-poorten	1	Batterijdiepte	50,8 cm
SmartSlot	✓	Batterijhoogte	33,9 cm
		Gewicht batterij	16,6 kg

Accu/Batterij		Verpakking	
Batterijtechnologie	Sealed Lead Acid (VRLA)	Meegeleverde kabels	USB-kabel
Acculevensduur (max)	5 jaar	Logistieke gegevens	
Accu/Batterij oplaadtijd	4 uur	Code geharmoniseerd systeem (HS) 85078000	
Koude start	✓	Overige specificaties	
Design		Netspanning, in bedrijf	230 V
Vormfactor *	Tower	Nominale input voltage	230 V



0731304346524



731304346524

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 05-MAR-2024. Prints or copies of Information are only valid on the printed Publication date