APC SMV1500CAI Noodstroomvoeding - 6x C13, USB, 1500VA

Merk : APC

Artikelcode: SMV1500CAI

Productnaam : SMV1500CAI Noodstroomvoeding - 6x C13, USB, 1500VA

APC SMV1500CAI Noodstroomvoeding - 6x C13, USB, 1500VA
APC SMV1500CAI Noodstroomvoeding - 6x C13, USB, 1500VA. UPS-topologie: Line-interactive, Output power capacity: 1,5 kVA, Uitgangsvermogen: 1050 W. Stopcontacttypes: C13 stekker, Stekker: C14 stekker, Aantal AC uitgangen: 6 AC-uitgang(en). Batterijtechnologie: Sealed Lead Acid (VRLA), Acculevensduur (max): 5 jaar, Accu/Batterij oplaadtijd: 4 uur. Vormfactor: Tower, Kleur van het product: Zwart, Grijs, Type beeldscherm: LCD. Breedte: 160 mm, Diepte: 410 mm, Hoogte: 220 mm

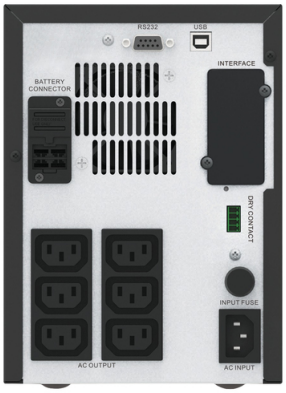

Kenmerken	
UPS-topologie *	Line-interactive
Output power capacity *	1,5 kVA
Uitgangsvermogen *	1050 W
Golfvorm *	Sinus
Ingang operation voltage (min) *	160 V
Ingang operation voltage (max) *	295 V
Frequentie *	45/65 Hz
Output frequentie	50/60 Hz
Automatic Voltage Regulation (AVR)	✓
Responstijd	2 ms
Efficientie	98,2 procent
Crest factor	3:1
Geluidsniveau	45 dB
Geluidsalarm(en)	✓
Hoorbare alarmstanden	Alarm bij werking op batterij, Alarm bij laag batterijniveau, Alarm bij overbelasting

Poorten & interfaces	
Stopcontacttypes	C13 stekker
Stekker	C14 stekker
Aantal AC uitgangen	6 AC-uitgang(en)
USB-poort	✓
Aantal USB 2.0-poorten	1

Accu/Batterij	
Batterijtechnologie	Sealed Lead Acid (VRLA)
Acculevensduur (max)	5 jaar
Accu/Batterij oplaadtijd	4 uur

Design	
Vormfactor *	Tower
Kleur van het product *	Zwart, Grijs
Type beeldscherm	LCD
LED-indicatoren	✓
Certificering	CE

Eisen aan de omgeving	
Bedrijfstemperatuur (T-T)	0 - 40 °C
Temperatuur bij opslag	-10 - 40 °C
Relatieve vochtigheid in bedrijf (V-V)	0 - 95 procent
Luchtvochtigheid bij opslag	0 - 95 procent
Hoogte, in bedrijf	0 - 3000 m
Hoogte bij opslag	0 - 3000 m

Gewicht en omvang	
Breedte	160 mm
Diepte	410 mm
Hoogte	220 mm
Gewicht	17,8 kg
Batterijbreedte	27,2 cm
Batterijdiepte	50,8 cm
Batterijhoogte	33,9 cm
Gewicht batterij	20,8 kg

Verpakking	
Meegeleverde kabels	USB-kabel
Gebruikershandleiding	✓

Publication date: 05-MAR-2024. Prints or copies of Information are only valid on the printed Publication date

Accu/Batterij	
Koude start	✓

Logistieke gegevens	
Code geharmoniseerd systeem (HS)	85078000

Overige specificaties	
Netspanning, in bedrijf	230 V
Nominale input voltage	230 V

731304346531

0731304346531

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 05-MAR-2024. Prints or copies of Information are only valid on the printed Publication date