




APC Easy PDU EPDU1116M, Metered, 0U, 16A, 230V,(18x)C13 & (3x)C19, IEC60309 16A stekker

Merk : APC

Artikelcode: EPDU1116M

Productnaam : Easy PDU EPDU1116M, Metered, 0U, 16A, 230V,(18x)C13 & (3x)C19, IEC60309 16A stekker


APC Easy PDU EPDU1116M, Metered, 0U, 16A, 230V,(18x)C13 & (3x)C19, IEC60309 16A stekker
APC Easy PDU EPDU1116M, Metered, 0U, 16A, 230V,(18x)C13 & (3x)C19, IEC60309 16A stekker. PDU types: Gemeten, Rackcapaciteit: 0U, Soort: Eenfasig. Aantal AC uitgangen: 21 AC-uitgang(en), Stopcontacttypes: C13 stekker, C19 stekker, Stekker: IEC 60309. Snoerlengte: 3 m. Monitoring: Stroom, Stroom, Spanning. Nominale input voltage: 200/208/230 V, Stroom (max.): 16 A, AC-ingangsfrequentie: 50 - 60 Hz



Design		Energie	
PDU types *	Gemeten	Maximale ingang stroom per fase	16 A
Soort	Eenfasig	Maximaal vermogen	3680 W
Rackcapaciteit *	0U	Certificaten	
Montage	Verticaal	Certificaten van naleving	RoHS
Materiaal behuizing	Aluminium	Certificering	CE, TUV
Kleur van het product	Zwart	Eisen aan de omgeving	
Beeldscherm	LCD	Bedrijfstemperatuur (T-T)	-5 - 45 °C
Aan/uitschakelaar	✗	Temperatuur bij opslag	-25 - 65 °C
Poorten & interfaces		Relatieve vochtigheid in bedrijf (V-V)	5 - 95 procent
Aantal AC uitgangen *	21 AC-uitgang(en)	Luchtvochtigheid bij opslag	5 - 95 procent
Stekker	IEC 60309	Hoogte, in bedrijf	0 - 3000 m
Stopcontacttypes *	C13 stekker, C19 stekker	Hoogte bij opslag	0 - 15000 m
Kenmerken		Gewicht en omvang	
Doorgelust	✗	Breedte	62 mm
LED-indicatoren	✓	Diepte	44 mm
Snoerlengte	3 m	Hoogte	902 mm
Beheerfuncties		Gewicht	2,5 kg
Monitoring	Stroom, Stroom, Spanning	Inhoud van de verpakking	
Upgraden van firmware mogelijk	✓	Gebruikershandleiding	✓
Energie		Verpakking	
Nominale input voltage *	200/208/230 V	Gewicht verpakking	3 kg
AC-ingangsfrequentie	50 - 60 Hz	Breedte verpakking	160 mm
Stroom (max.) *	16 A	Diepte verpakking	110 mm
Netspanning, in bedrijf	230 V	Hoogte verpakking	1320 mm
Laad-capaciteit	3680 VA		

Logistieke gegevens

Totale Koolstofvoetafdruk (kg of CO2e)	18942,6
--	---------

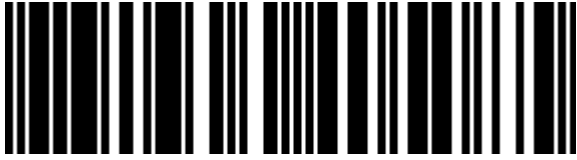

0731304405085



731304405085

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.