



## TP-Link TL-SG1428PE netwerk-switch Managed L2 Gigabit Ethernet (10/100/1000) Power over Ethernet (PoE) 1U Zwart

**Merk :** TP-Link

**Artikelcode:** TL-SG1428PE

**Productnaam :** TL-SG1428PE



TP-Link TL-SG1428PE. Switch type: Managed, Switch-laag: L2. Type basis-switching RJ-45 Ethernet-poorten: Gigabit Ethernet (10/100/1000), Aantal basis-switching RJ-45 Ethernet-poorten: 26. MAC-adrestabel: 8000 entries, Switchingcapaciteit: 56 Gbit/s. Netwerkstandaard: IEEE 802.1Q, IEEE 802.1p, IEEE 802.3, IEEE 802.3ab, IEEE 802.3af, IEEE 802.3at, IEEE 802.3u, IEEE.... Power over Ethernet (PoE). Rack-montage, Vormfactor: 1U



| Beheerfuncties                                  |                                                                                                          | Multicast-functies                              |                  |
|-------------------------------------------------|----------------------------------------------------------------------------------------------------------|-------------------------------------------------|------------------|
| Switch type *                                   | Managed                                                                                                  | Multicast-ondersteuning                         | ✓                |
| Switch-laag                                     | L2                                                                                                       | Design                                          |                  |
| Quality of Service (QoS)                        | ✓                                                                                                        | Rack-montage *                                  | ✓                |
| Web-gebaseerd management                        | ✓                                                                                                        | Vormfactor                                      | 1U               |
| Poorten & interfaces                            |                                                                                                          | Kleur van het product                           | Zwart            |
| Aantal basis-switching RJ-45 Ethernet-poorten * | 26                                                                                                       | Aantal ventilatoren                             | 2 ventilator(en) |
| Type basis-switching RJ-45 Ethernet-poorten *   | Gigabit Ethernet (10/100/1000)                                                                           | Energie                                         |                  |
| Aantal Gigabit Ethernet (koper)-poorten         | 26                                                                                                       | Stroombron *                                    | AC               |
| Aantal moduleslots SPF                          | 2                                                                                                        | Vermogenstoevoer inclusief *                    | ✓                |
| Netwerk                                         |                                                                                                          | AC-ingangsspanning                              | 100 - 240 V      |
| Netwerkstandaard *                              | IEEE 802.1Q, IEEE 802.1p, IEEE 802.3, IEEE 802.3ab, IEEE 802.3af, IEEE 802.3at, IEEE 802.3u, IEEE 802.3x | AC-ingangsfrequentie                            | 50 - 60 Hz       |
| 10G support *                                   | ✗                                                                                                        | Vermogensverbruik (max)                         | 1039,03 W        |
| Koperen ethernetbekabelingstechnologie          | 10BASE-T, 100BASE-TX, 1000BASE-T                                                                         | Power over Ethernet (PoE)                       |                  |
| Ondersteundende kabel types                     | Cat3, Cat4, Cat5, Cat5e, Cat6                                                                            | Power over Ethernet (PoE) *                     | ✓                |
| Port mirroring                                  | ✓                                                                                                        | Aantal Power over Ethernet plus (PoE +)-poorten | 24               |
| Datastroombeheer                                | ✓                                                                                                        | Vermogen per poort Power over Ethernet (PoE)    | 30 W             |
| Verbindingsaggregatie                           | ✓                                                                                                        | Totaal Power over Ethernet (PoE)-budget         | 250 W            |
| Broadcast stormbeheer                           | ✓                                                                                                        | Eisen aan de omgeving                           |                  |
| Rate limiting                                   | ✓                                                                                                        | Bedrijfstemperatuur (T-T)                       | 0 - 50 °C        |
| Auto MDI/MDI-X                                  | ✓                                                                                                        | Temperatuur bij opslag                          | -40 - 70 °C      |
| Auto-negotiation                                | ✓                                                                                                        | Relatieve vochtigheid in bedrijf (V-V)          | 10 - 90 procent  |
|                                                 |                                                                                                          | Luchtvochtigheid bij opslag                     | 5 - 90 procent   |


| Netwerk                             |                              | Gewicht en omvang                         |               |
|-------------------------------------|------------------------------|-------------------------------------------|---------------|
| VLAN=ondersteuning                  | ✓                            | Breedte                                   | 440 mm        |
| Virtuele LAN-functies               | Port-based VLAN, Tagged VLAN | Diepte                                    | 220 mm        |
| Aantal VLANs                        | 32                           | Hoogte                                    | 44 mm         |
| Optische vezel                      |                              | Inhoud van de verpakking                  |               |
| Fiber ethernet cabling technologie  | 1000BASE-X                   | Meegeleverde kabels                       | AC            |
| Data-uitwisseling                   |                              | Gebruiksaanwijzing                        | ✓             |
| Switchingcapaciteit *               | 56 Gbit/s                    | Rekbevestigingspakket                     | ✓             |
| Verzending snelheid                 | 41,7 Mpps                    | Verpakking                                |               |
| MAC-adrestabel *                    | 8000 entries                 | Breedte verpakking                        | 336 mm        |
| Store-and-forward                   | ✓                            | Diepte verpakking                         | 528 mm        |
| Aantal wachtrijen                   | 4                            | Hoogte verpakking                         | 100 mm        |
| Jumbo Frames ondersteuning          | ✓                            | Gewicht verpakking                        | 3,94 kg       |
| Jumbo frames                        | 10000                        | Certificaten                              |               |
| Packet buffergeheugen               | 4,1 MB                       | Certificering                             | CE, FCC, RoHS |
| Beveiliging                         |                              | Logistieke gegevens                       |               |
| IGMP snooping                       | ✓                            | Code geharmoniseerd systeem (HS) 85176990 |               |
| Ondersteunde beveiligingsalgoritmen | SNMP, SNMPv2, SNMPv3         |                                           |               |



6935364072216




6935364072209

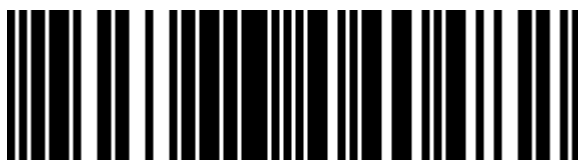

0845973040482



845973040482

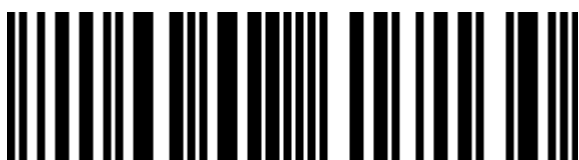

1210002617130

### Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.