



APC Back-UPS BX1600MI-GR Noodstroomvoeding 1600VA 4x stopcontact, USB

Merk : APC

Artikelcode: BX1600MI-GR

Productnaam : Back-UPS BX1600MI-GR
Noodstroomvoeding 1600VA 4x stopcontact, USB




APC Back-UPS BX1600MI-GR Noodstroomvoeding 1600VA 4x stopcontact, USB
APC Back-UPS BX1600MI-GR Noodstroomvoeding 1600VA 4x stopcontact, USB. UPS-topologie: Line-interactive, Output power capacity: 1,6 kVA, Uitgangsvermogen: 900 W. Stopcontacttypes: Type F, Stekker: Type F, Aantal AC uitgangen: 4 AC-uitgang(en). Batterijtechnologie: Sealed Lead Acid (VRLA), Typische backup tijd op volledige lading: 1 min, Typische backup tijd op halve lading: 6,5 min. Vormfactor: Compact, Kleur van het product: Zwart, Snoerlengte: 1,2 m. Breedte: 140 mm, Diepte: 390 mm, Hoogte: 190 mm



Features		Battery	
UPS topology *	Line-Interactive	Typical backup time at full load	1 min
Output power capacity *	1.6 kVA	Typical backup time at half load	6.5 min
Output power *	900 W	Battery life (max)	2 year(s)
Waveform *	Sine	Battery recharge time	8 h
Input operation voltage (min) *	140 V	Design	
Input operation voltage (max) *	300 V	Form factor *	Compact
Input frequency *	50/60 Hz	Cable length	1.2 m
Output operation voltage (min)	230 V	Built-in fan	✓
Output operation voltage (max)	230 V	Product colour *	Black
Output frequency	50/60 Hz	LED indicators	✓
Output frequency regulation	0.5 Hz	International Protection (IP) code	IP20
Output voltage regulation	10%	Certification	CB Meet EN62040-1 / CE / IEC-62040-1 / IEC-62040-2
Automatic Voltage Regulation (AVR)	✓	Operational conditions	
Surge energy rating	273 J	Operating temperature (T-T)	0 - 40 °C
Response time	6 ms	Storage temperature (T-T)	-15 - 40 °C
Input power factor	0.56	Operating relative humidity (H-H)	0 - 95%
Noise level	40 dB	Operating altitude	0 - 3000 m
Surge protection	✓	Technical details	
Audible alarm(s)	✓	Compliance certificates	RoHS
Audible alarm modes	Low battery alarm	Weight & dimensions	
Ports & interfaces		Width	140 mm
AC outlet types	Type F	Depth	390 mm
Power plug	Type F	Height	190 mm
AC outlets quantity	4 AC outlet(s)	Weight	10.3 kg
USB port	✓	Package width	235 mm
USB 2.0 ports quantity	1	Package depth	495 mm
USB port type	USB Type-B		
Ethernet LAN (RJ-45) ports	2		

Battery		Weight & dimensions	
Battery technology	Sealed Lead Acid (VRLA)	Package height	297 mm
		Package weight	11.3 kg
		Packaging data	
		Cables included	Input power cable
		Manual	✓
		Logistics data	
		Harmonized System (HS) code	85078000

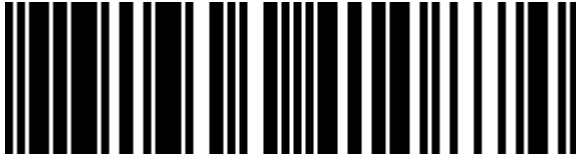

0731304410874



731304410874

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 08-JAN-2025. Prints or copies of Information are only valid on the printed Publication date