



APC Back-UPS BX750MI-GR Noodstroomvoeding - 750VA, 4x stopcontact, USB

Merk : APC

Artikelcode: BX750MI-GR


Productnaam : APC Back-UPS BX750MI-GR
Noodstroomvoeding - 750VA, 4x stopcontact, USB

- Compact formaat is geschikt voor installatie in verschillende omgevingen
 - AVR corrigeert spanningsvariaties om betrouwbare stroom te leveren
 - LED-display biedt duidelijk leesbare status van het apparaat en netvoeding
 - Geluidsalarmen geven een melding van een wijziging in de netvoeding en de netvoedingscondities van de UPS
 - Datalijnbescherming garandeert een volledige bescherming van uw apparatuur tegen spanningspieken
- APC Back-UPS BX750MI-GR Noodstroomvoeding - 750VA, 4x stopcontact, USB
APC Back-UPS BX750MI-GR Noodstroomvoeding - 750VA, 4x stopcontact, USB. UPS-topologie: Line-interactive, Output power capacity: 0,75 kVA, Uitgangsvermogen: 410 W. Stopcontacttypes: Type F, Stekker: Type F, Aantal AC uitgangen: 4 AC-uitgang(en). Batterijtechnologie: Sealed Lead Acid (VRLA), Typische backup tijd op volledige lading: 1 min, Typische backup tijd op halve lading: 8,5 min. Vormfactor: Compact, Kleur van het product: Zwart, Snoerlengte: 1,2 m. Breedte: 120 mm, Diepte: 355 mm, Hoogte: 160 mm



Features		Battery	
UPS topology *	Line-Interactive	Typical backup time at full load	1 min
Output power capacity *	0.75 kVA	Typical backup time at half load	8.5 min
Output power *	410 W	Battery life (max)	2 year(s)
Waveform *	Sine	Battery recharge time	6 h
Input operation voltage (min) *	140 V	Design	
Input operation voltage (max) *	300 V	Form factor *	Compact
Input frequency *	50/60 Hz	Cable length	1.2 m
Output operation voltage (min)	230 V	Product colour *	Black
Output operation voltage (max)	230 V	LED indicators	✓
Output frequency	50/60 Hz	International Protection (IP) code	IP20
Output frequency regulation	0.5 Hz	Certification	CB Meet EN62040-1 / CE / IEC-62040-1 / IEC-62040-2
Output voltage regulation	10%	Operational conditions	
Automatic Voltage Regulation (AVR) ✓		Operating temperature (T-T)	0 - 40 °C
Surge energy rating	273 J	Storage temperature (T-T)	-15 - 40 °C
Response time	6 ms	Operating relative humidity (H-H)	0 - 95%
Input power factor	0.63	Operating altitude	0 - 3000 m
Noise level	40 dB	Technical details	
Surge protection ✓		Compliance certificates	RoHS
Audible alarm(s) ✓		Weight & dimensions	
Audible alarm modes	Low battery alarm	Width	120 mm
Ports & interfaces		Depth	355 mm
AC outlet types	Type F	Height	160 mm
Power plug	Type F	Weight	5.4 kg
AC outlets quantity	4 AC outlet(s)	Package width	197 mm
USB port ✓		Package depth	430 mm
USB 2.0 ports quantity	1	Package height	250 mm
USB port type	USB Type-B		
Ethernet LAN (RJ-45) ports	2		

Battery		Weight & dimensions	
Battery technology	Sealed Lead Acid (VRLA)	Package weight	5.9 kg
Packaging data			
		Cables included	Input power cable
		Manual	✓
Logistics data			
		Harmonized System (HS) code	85078000

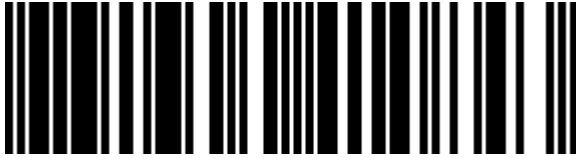

0731304410843



731304410843

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.