



APC Back-UPS BVX700LI-GR Noodstroomvoeding - 700VA, 2x stopcontact

Merk : APC

Artikelcode: BVX700LI-GR

Productnaam : Back-UPS BVX700LI-GR
Noodstroomvoeding - 700VA, 2x stopcontact

- Compact formaat is geschikt voor installatie in verschillende omgevingen
- AVR corrigeert spanningsvariaties om betrouwbare stroom te leveren
- LED-display biedt duidelijk leesbare status van het apparaat en netvoeding
- Met de koude-startfunctie kunt u de UPS opnieuw opstarten, zelfs als er geen netvoeding beschikbaar is
- De back-upcapaciteit voor voeding herstellen met door de gebruiker vervangbare batterij (APCRBC110 wordt apart verkocht)


APC Back-UPS BVX700LI-GR Noodstroomvoeding - 700VA, 2x stopcontact

APC Back-UPS BVX700LI-GR Noodstroomvoeding - 700VA, 2x stopcontact. UPS-topologie: Line-interactive, Output power capacity: 0,7 kVA, Uitgangsvermogen: 360 W. Stopcontacttypes: Type F, Stekker: Type F, Aantal AC uitgangen: 2 AC-uitgang(en). Batterijtechnologie: Sealed Lead Acid (VRLA), Batterij capaciteit: 7 Ah, Accu/Batterij voltage: 12 V. Vormfactor: Compact, Kleur van het product: Zwart, Internationale veiligheidscode (IP): IP20. Breedte: 31 mm, Diepte: 138 mm, Hoogte: 98 mm



Features		Battery	
UPS topology *	Line-Interactive	Battery voltage	12 V
Output power capacity *	0.7 kVA	Battery life (max)	2 year(s)
Output power *	360 W	Battery recharge time	8 h
Waveform *	Sine	Cold start	✔
Input operation voltage (min) *	170 V	Design	
Input operation voltage (max) *	280 V	Form factor *	Compact
Input frequency *	50/60 Hz	Product colour *	Black
Output operation voltage (min)	230 V	LED indicators	✔
Output operation voltage (max)	230 V	International Protection (IP) code	IP20
Output frequency	50/60 Hz	Certification	CB, CE, EN/IEC 62040-1, EN/IEC 62040-2
Output frequency regulation	0.5 Hz	Operational conditions	
Output voltage regulation	10%	Operating temperature (T-T)	0 - 40 °C
Automatic Voltage Regulation (AVR)	✔	Storage temperature (T-T)	-15 - 40 °C
Surge energy rating	273 J	Operating relative humidity (H-H)	0 - 95%
Response time	6 ms	Operating altitude	0 - 3000 m
Input power factor	0.51	Non-operating altitude	0 - 3000 m
Noise level	40 dB	Weight & dimensions	
Surge protection	✔	Width	31 mm
Audible alarm(s)	✔	Depth	138 mm
Audible alarm modes	Alarm when on battery, Battery replacement, Low battery alarm, Overload alarm	Height	98 mm
		Weight	4.5 kg
		Package width	222 mm
		Package depth	346 mm
Ports & interfaces		Package height	142 mm
AC outlet types	Type F	Package weight	4.5 kg
Power plug	Type F		
AC outlets quantity	2 AC outlet(s)		
Battery			
Battery technology	Sealed Lead Acid (VRLA)		

Battery		Packaging data	
Battery capacity	7 Ah	Cables included	Input power cable
		Manual	✓
Logistics data			
Harmonized System (HS) code		85078000	

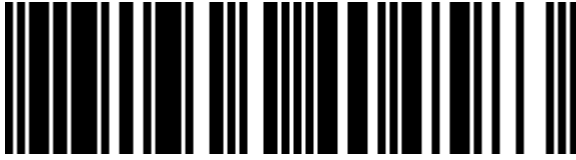

0731304404583



731304404583

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 08-JAN-2025. Prints or copies of Information are only valid on the printed Publication date