



## APC Back-UPS BVX900LI-GR Noodstroomvoeding - 900VA, 2x stopcontact

**Merk :** APC

**Artikelcode:** BVX900LI-GR


**Productnaam :** Back-UPS BVX900LI-GR  
Noodstroomvoeding - 900VA, 2x stopcontact

APC Back-UPS BVX900LI-GR Noodstroomvoeding - 900VA, 2x stopcontact  
APC Back-UPS BVX900LI-GR Noodstroomvoeding - 900VA, 2x stopcontact. UPS-topologie: Line-interactive, Output power capacity: 0,9 kVA, Uitgangsvermogen: 480 W. Stopcontacttypes: Type F, Stekker: Type F, Aantal AC uitgangen: 2 AC-uitgang(en). Batterijtechnologie: Sealed Lead Acid (VRLA), Batterij capaciteit: 9 Ah, Accu/Batterij voltage: 12 V. Vormfactor: Compact, Kleur van het product: Zwart, Internationale veiligheidscode (IP): IP20. Breedte: 120 mm, Diepte: 355 mm, Hoogte: 160 mm



| Features                           |   | Battery                            |  |
|------------------------------------|---|------------------------------------|--|
| UPS topology *                     | Line-Interactive  | Battery voltage                    | 12 V                                   |
| Output power capacity *            | 0.9 kVA   | Battery life (max)                 | 2 year(s)                              |
| Output power *                     | 480 W   | Battery recharge time              | 8 h                                    |
| Waveform *                         | Sine  | Cold start                         | ✓                                      |
| Input operation voltage (min) *    | 170 V   | <b>Design</b>                      |  |
| Input operation voltage (max) *    | 280 V   | Form factor *                      | Compact                                |
| Input frequency *                  | 50/60 Hz  | Product colour *                   | Black                                  |
| Output operation voltage (min)     | 230 V   | LED indicators                     | ✓                                      |
| Output operation voltage (max)     | 230 V   | International Protection (IP) code | IP20                                   |
| Output frequency                   | 50/60 Hz  | Certification                      | CB, CE, EN/IEC 62040-1, EN/IEC 62040-2 |
| Output frequency regulation        | 0.5 Hz  | <b>Operational conditions</b>      |  |
| Output voltage regulation          | 10%   | Operating temperature (T-T)        | 0 - 40 °C                              |
| Automatic Voltage Regulation (AVR) | ✓   | Storage temperature (T-T)          | -15 - 40 °C                            |
| Surge energy rating                | 273 J   | Operating relative humidity (H-H)  | 0 - 95%                                |
| Response time                      | 6 ms  | Operating altitude                 | 0 - 3000 m                             |
| Input power factor                 | 0.53  | Non-operating altitude             | 0 - 3000 m                             |
| Noise level                        | 40 dB   | <b>Weight &amp; dimensions</b>     |  |
| Surge protection                   | ✓   | Width                              | 120 mm                                 |
| Audible alarm(s)                   | ✓   | Depth                              | 355 mm                                 |
| Audible alarm modes                | Alarm when on battery, Battery replacement, Low battery alarm, Overload alarm | Height                             | 160 mm                                 |
| <b>Ports &amp; interfaces</b>      |   | Weight                             | 6 kg                                   |
| AC outlet types                    | Type F  | Package width                      | 197 mm                                 |
| Power plug                         | Type F  | Package depth                      | 430 mm                                 |
| AC outlets quantity                | 2 AC outlet(s)  | Package height                     | 250 mm                                 |

| Battery            |                         | Weight & dimensions         |                   |
|--------------------|-------------------------|-----------------------------|-------------------|
| Battery technology | Sealed Lead Acid (VRLA) | Package weight              | 6.5 kg            |
| Battery capacity   | 9 Ah                    | Packaging data              |                   |
|                    |                         | Cables included             | Input power cable |
|                    |                         | Manual                      | ✓                 |
|                    |                         | Logistics data              |                   |
|                    |                         | Harmonized System (HS) code | 85078000          |

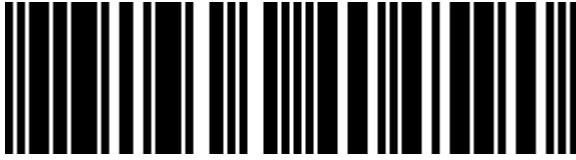

0731304404590



731304404590

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.