



APC Back-UPS BVX1200LI-GR Noodstroomvoeding - 1200VA, 4x stopcontact

Merk : APC

Artikelcode: BVX1200LI-GR

Productnaam : Back-UPS BVX1200LI-GR
Noodstroomvoeding - 1200VA, 4x stopcontact


APC Back-UPS BVX1200LI-GR Noodstroomvoeding - 1200VA, 4x stopcontact
APC Back-UPS BVX1200LI-GR Noodstroomvoeding - 1200VA, 4x stopcontact. UPS-topologie: Line-interactive, Output power capacity: 1,2 kVA, Uitgangsvermogen: 650 W. Stopcontacttypes: Type F, Stekker: Type F, Aantal AC uitgangen: 4 AC-uitgang(en). Batterijtechnologie: Sealed Lead Acid (VRLA), Batterij capaciteit: 9 Ah, Accu/Batterij voltage: 12 V. Kleur van het product: Zwart, Snoerlengte: 1,2 m, Internationale veiligheidscode (IP): IP20. Certificering: CE, EN/IEC 62040-1, EN/IEC 62040-2



Features		Design	
UPS topology *	Line-Interactive	Cable length	1.2 m
Output power capacity *	1.2 kVA	Product colour *	Black
Output power *	650 W	LED indicators	✓
Waveform *	Sine	International Protection (IP) code	IP20
Input operation voltage (min) *	140 V	Operational conditions	
Input operation voltage (max) *	300 V	Operating temperature (T-T)	0 - 40 °C
Input frequency *	50/60 Hz	Storage temperature (T-T)	-15 - 40 °C
Output frequency	50/60 Hz	Operating relative humidity (H-H)	0 - 95%
Automatic Voltage Regulation (AVR)	✓	Operating altitude	0 - 3000 m
Surge energy rating	273 J	Non-operating altitude	0 - 3000 m
Response time	6 ms	Certificates	
Audible alarm(s)	✓	Certification	CE, EN/IEC 62040-1, EN/IEC 62040-2
Ports & interfaces		Packaging content	
AC outlet types	Type F	Cables included	Input power cable
Power plug	Type F	Weight & dimensions	
AC outlets quantity	4 AC outlet(s)	Width	140 mm
Battery		Depth	390 mm
Battery technology	Sealed Lead Acid (VRLA)	Height	190 mm
Battery capacity	9 Ah	Weight	7.5 kg
Battery voltage	12 V	Packaging data	
Battery life (max)	3 year(s)	Package width	495 mm
Battery recharge time	8 h	Package depth	235 mm
Cold start	✓	Package height	297 mm
		Package weight	8.5 kg

Logistics data

Harmonized System (HS) code	85078000
-----------------------------	----------

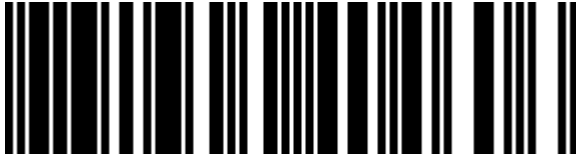

0731304404606



731304404606

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 12-FEB-2025. Prints or copies of Information are only valid on the printed Publication date