



TP-Link TL-SF1048 Unmanaged Fast Ethernet (10/100) 1U Zwart

Merk : TP-Link
Artikelcode: TL-SF1048 V7
Productnaam : TL-SF1048

48 10/100Mbps RJ45 Ports (Auto Negotiation/Auto MDI/MDIX), IEEE 802.3i/3u/3x, 440 x 180 x 44 mm, 220V/50Hz
TP-Link TL-SF1048. Switch type: Unmanaged. Type basis-switching RJ-45 Ethernet-poorten: Fast Ethernet (10/100), Aantal basis-switching RJ-45 Ethernet-poorten: 48. MAC-adrestabel: 8000 entries, Switchingcapaciteit: 9,6 Gbit/s. Netwerkstandaard: IEEE 802.3i, IEEE 802.3u, IEEE 802.3x. Rack-montage, Vormfactor: 1U




Beheerfuncties		Prestatie	
Switch type *	Unmanaged	Compatibele besturingssystemen	Microsoft Windows 8, 7,Vista, XP, MAC OS, NetWare, UNIX, Linux
Poorten & interfaces		Fanloos	✓
Aantal basis-switching RJ-45 Ethernet-poorten *	48	Technische details	
Type basis-switching RJ-45 Ethernet-poorten *	Fast Ethernet (10/100)	Certificaten van naleving	Federal Communications Commission (FCC), CE, RoHS
Fast Ethernet (koperen) ports kwantiteit	48	Energie	
Netwerk		Stroombron *	AC
Netwerkstandaard *	IEEE 802.3i, IEEE 802.3u, IEEE 802.3x	Vermogenstoevoer inclusief *	✓
10G support *	✗	AC-ingangsspanning	100 - 240 V
Koperen ethernetbekabelingstechnologie	100BASE-TX, 10BASE-T	AC-ingangsfrequentie	50/60 Hz
Ondersteundende kabel types	Cat3, Cat5e, Cat4, Cat5	Vermogensverbruik (max)	9,9 W
Datastroombeheer	✓	Power over Ethernet (PoE)	
Auto MDI/MDI-X	✓	Power over Ethernet (PoE) *	✗
Ethernet LAN, data-overdrachtsnelheden	10,100 Mbit/s	Eisen aan de omgeving	
Auto-negotiation	✓	Bedrijfstemperatuur (T-T)	0 - 40 °C
Data-uitwisseling		Temperatuur bij opslag	-40 - 70 °C
Switchingcapaciteit *	9,6 Gbit/s	Relatieve vochtigheid in bedrijf (V-V)	10 - 90 procent
Verzending snelheid	7,14 Mpps	Luchtvochtigheid bij opslag	5 - 90 procent
MAC-adrestabel *	8000 entries	Warmtedissipatie	33,78 BTU/h
Store-and-forward	✓	Gewicht en omvang	
Protocollen		Breedte	440 mm
Ondersteunde netwerkprotocollen	CSMA/CD, TCP/IP	Diepte	260 mm
Design		Hoogte	44 mm
Rack-montage *	✓	Verpakking	
Stapelbaar *	✗	Meegeleverde kabels	AC
Vormfactor	1U	Gebruiksaanwijzing	✓
Kleur van het product	Zwart	Type verpakking	Doos
Materiaal behuizing	Metaal	Rekbevestigingspakket	✓
LED-indicatoren	✓	Breedte verpakking	250 mm
		Diepte verpakking	528 mm
		Hoogte verpakking	80 mm
		Gewicht verpakking	2,62 kg

Duurzaamheid

Naleving van duurzaamheid



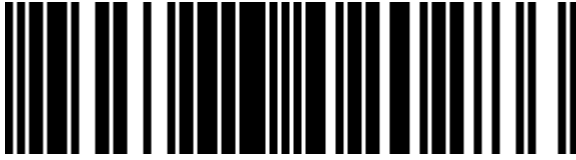

0845973020286



845973020286



6935364021702



6935364020286



0631058211843



631058211843

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.