



## Cat.6 Connection Box, IDC/LSA, shielded

Part no.: NP0012A

### Technical Features

Suitable for shielded or unshielded solid network cable

Suitable for Cat.5e or Cat.6 connections or extensions

Suitable for AWG26 up to AWG22 wire



Easy LSA/IDC connection

PVC housing, metallized

Operating Temperature: 0°C ~ 70°C

Storage Temperature: -40°C ~ 85°C

### Technical Drawings

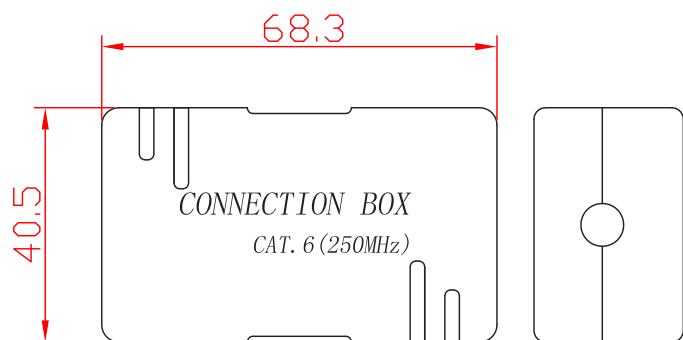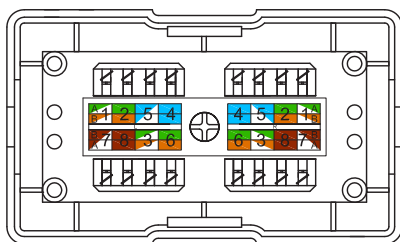

Voltage Rating: 125 VAC RMS  
 Current Rating: 1.5 Amp  
 Constant Resistance: 100 Milliohms max  
 Insulation Resistance: 100 Megohms min @500 VDC  
 Dielectric Strength: 750 VAC RMS 60Hz, 1 min

NP0012A



4 260113 567937

Made in China

[www.logilink.de](http://www.logilink.de)



RoHS  
compliant



\* The specifications and pictures are subject to change without notice.  
 \*All trade names referenced are the registered trademark of their respective owners.

## Package Contents

Cat.6 Connection Box, IDC/LSA x 1

## Packaging Informations

Packing Dimension	66 x 36 x 25mm
Packing Weight	0.05kg
Carton Dimension	51.5 x 28.5 x 43mm
Carton Q'ty	180pcs
Carton Weight	13kg

NP0012A



4 260113 567937

Made in China

[www.logilink.de](http://www.logilink.de)



RoHS  
compliant



\* The specifications and pictures are subject to change without notice.  
\*All trade names referenced are the registered namework of their respective owners.