


# Delock MiniPCIe I/O PCIe full size 2 x Gigabit Lan

## Description

This miniPCIe adapter by Delock expands your system by two Gigabit Lan interface, which you can lead out via the slot bracket.

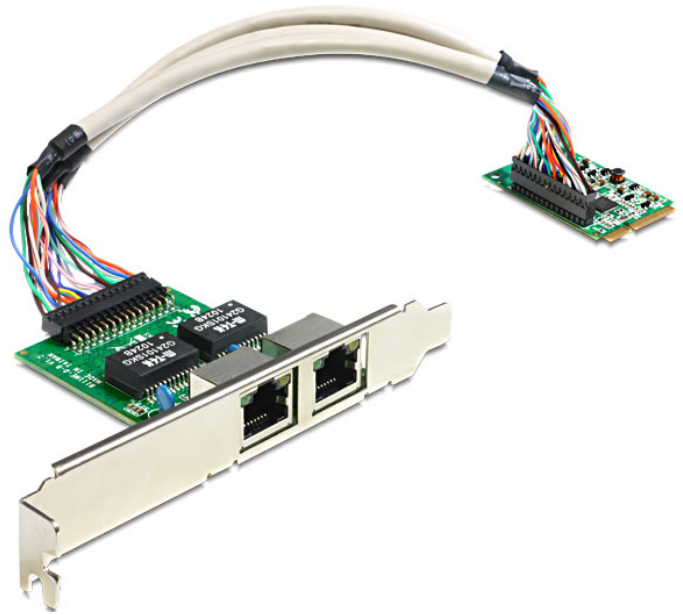

## Specification

- Chipset: Realtek RTL8111E
- Form factor: miniPCIe full size
- Interface: PCI Express Revision 1.1
- Connector: 2 x Gigabit Lan
- Data transfer rate up to 10/100/1000 Mb/s
- Compatible with IEEE 802.3, IEEE 802.3u, IEEE 802.3ab
- Automatic MDI/MDI crossover correction
- Support IEEE 802.1P layer 2 priority encoding
- Support IEEE 8021Q VLAN insertion and removal
- Support D3 Enhanced Power Down mode
- Integrated switching regulator and 3.3 V power source
- Cable length with connector: ca. 21.5 cm
- Operating temperature: -10 °C ~ 80 °C
- Storage temperature: -20 °C ~ 95 °C

## System requirements

- Windows 2000/XP/Vista/7/7-64/8, Linux ex Kernel 2.6
- Mainboard with a free miniPCIe slot with a PCIe interface
- PC with a free PC slot

## Item No. 95237



EAN	4043619952373
Country of origin	Taiwan, Republic of China

## Package content

- MiniPCIe module
- Connecting cable
- Gigabit Lan bracket
- Driver CD
- User manual

## Package

- Blister