




FCS-5065 Hardware Versie: 1

Zoom Network Camera, 5-Megapixel, Outdoor, PoE 802.3af, Day & Night, IR LEDs, 12x, WDR

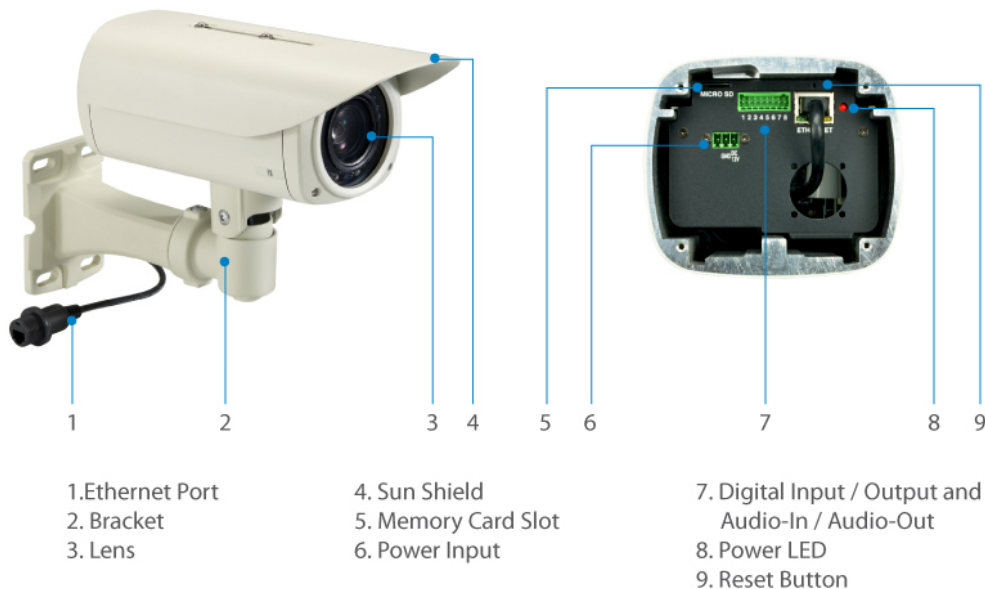

Key Features

- Ingebouwde Micro SDHC/SDXC-kaartsleuf voor lokale opslag
- 5-Megapixel (2592 x 1944) hoge definitie resolutie
- Weerbestendig IP67-beoordeeld met brede bedieningstemperatuur (-40°C tot 50°C) voor ruwe omgevingen
- Met WDR (Breed Dynamisch Bereik) om zichtbaarheid te verbeteren in zeer heldere of donkere omgevingen
- Ondersteunt 12x Optische zoom
- Vandalismebestendige behuizing met IK10-specificatie
- Ingebouwde infrarode LED's voor nachtwoergave tot maximaal 40m
- Compressie: H.264/MJPEG
- Verwijderbaar IR-afkapfilter voor surveillance overdag en 's nachts
- Tweevoudig energieverbruik: 12VDC/PoE (IEEE 802.3af)
- Inclusief gratis 64 kanalen controlesoftware (ondersteunt OneSecure-App)



Specifications

System Specifications

Standards & Protocols:

IEEE 802.3 10-BASE-T, Ethernet

IEEE 802.3u 100-BASE-TX, Fast Ethernet

IEEE 802.3af Power over Ethernet (PoE)

TCP, UDP, HTTP, HTTPS, DHCP, PPPoE, RTP, RTSP, IPv6, DNS, DDNS, NTP, ICMP, ARP, IGMP, SMTP, FTP, UPnP, SNMP, Bonjour

Image Sensor:

5-Megapixel 1/3" Progressive Scan CMOS

Connectors and Cabling:

1 x RJ-45 10/100 Mbps PoE Port

1 x Line In

1 x Line Out

1 x Power terminal block

I/O terminal block (1 DI/1 DO)

Modularity:

1 x MicroSDHC/ MicroSDXC card slot

Button:

Reset Button

Indicator:

Power

Lens:

Zoom, DC iris, Auto focus, f4.9-49mm, F1.8-3.0

IR Cut Filter:

Removable infrared-cut filter for day & night function

IR LED:

27 Adaptive IR LEDs for illumination up to 43m

Shutter Time:

1/5 ~ 1/10,000 sec

Angle of View:

48.4° ~ 4.8°

Pan/Tilt/Zoom:

12x Optical Zoom, Digital Zoom to very high detail available on Software

Video Compression:

H.264 / MJPEG

Resolution:

5M (2592x1944)

Video Format:

RAW

Audio Compression:

G.711

Power:

Power Consumption: PoE Class 3 (IEEE802.3af) and DC 12V / 12W (built-in heater and IR on)

Power Input: DC 12V / 802.3af PoE

Features

Video:

- Image Setting: - Adjustable image size, quality and bit rate
- Configurable brightness, sharpness, contrast, saturation, white balance and exposure
- AGC/AWB/AES
- Back Light Compensation (BLC)
- Wide Dynamic Range (WDR), Basic WDR (74 dB)
- 2D Noise Reduction (2DNR)

Streaming: Up to 2 video streams

2D+3D DNR

Audio:

Streaming: 2-way audio

Input/Output: line input, line output

Performance**Data Transfer Rate:**

10/100Mbps

Storage Capacity:

SD/MicroSD memory card of up to 64GB

Frame Rate:

15 fps at 2592 x 1944; 15 fps at 2048 x 1536; 30 fps at 1920 x 1080; 30 fps at 1280 x 720; 30 fps at 640 x 480; 15 fps at 320x240

Minimum illumination:

Color: 0.1 lux at F1.8

B/W: 0 lux (IR LED on)

Environment**Temperature (°C):**

Operating: -30°C ~ 50°C

Humidity (Non-condensing):

Operating: 10% ~ 85%

Physical Specifications**Dimensions (W x D x H mm):**

122 x 240 x 101 mm

Weight (g):

2390 g

Enclosure:

Weather proof IP67-rated housing

Vandal proof IK10-rated

Others**Approval and Compliance:**

CE, RoHS, FCC, ONVIF, IP67, IK10, NEMA 4X

Deployment:


Wall Mount

Operation Systems:

Microsoft Windows 8/7/Vista/XP



Schema

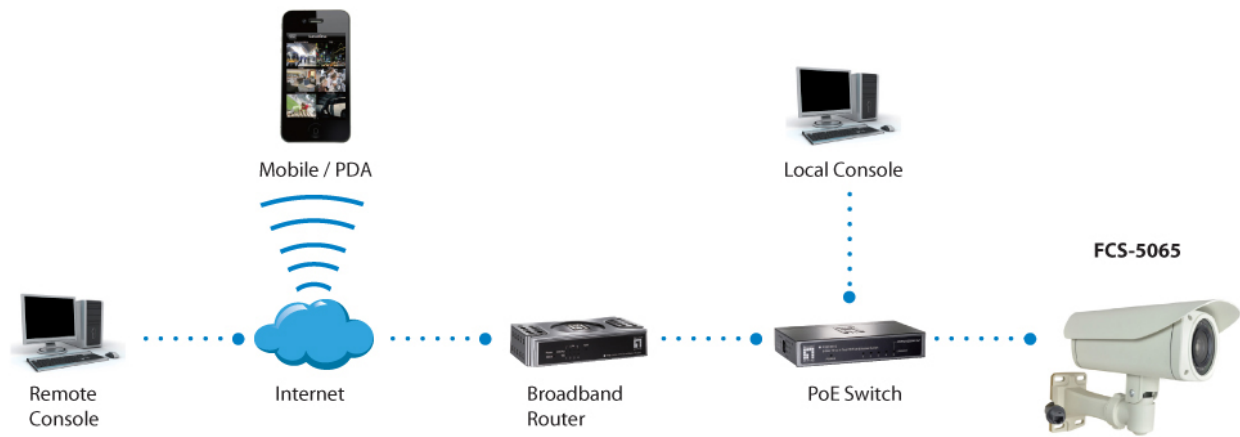

Order Information

FCS-5065

Package Contents

FCS-5065
Bracket
Mounting Kit
Screw Kit
Quick Installation Guide
Resource CD (User Manual, Utility, QIG)

Accessoires



CAS-2504
Pole Mount



CAS-3300
Ceiling Bracket

No liability or responsibility for any errors or omissions in the content.
Specifications are subject to change without notice.
All mentioned brand names are registered trademarks and property of their owners.
Copyright © Digital Data Communications GmbH, Germany. All Rights Reserved.