



APC Smart-UPS On-Line 1000VA noodstroomvoeding 6x C13, USB

Merk : APC

Artikelcode: SURT1000XLI

Productnaam : Smart-UPS On-Line 1000VA
noodstroomvoeding 6x C13, USB


Smart-UPS On-Line 1000VA noodstroomvoeding 6x C13, USB

APC Smart-UPS On-Line 1000VA noodstroomvoeding 6x C13, USB. UPS-topologie: Dubbele conversie (online), Output power capacity: 1 kVA, Uitgangsvermogen: 700 W. Stopcontacttypes: C13 stekker, Stekker: C14 stekker, Aantal AC uitgangen: 6 AC-uitgang(en). Batterijtechnologie: Sealed Lead Acid (VRLA), Batterij capaciteit: 328 VAh, Typische backup tijd op volledige lading: 13,8 min. Vormfactor: Rackmontage/toren, Kleur van het product: Zwart, Rackcapaciteit: 2U. Certificaten van naleving: RoHS, Certificering: C-tick, CE, EN 50091-1, EN 50091-2, EN 55022 Class A, EN 60950, EN 61000-3-2, GOST, VDE, REACH,...



Features		Battery	
UPS topology *	Double-conversion (Online)	Cold start	✓
Output power capacity *	1 kVA	Design	
Output power *	700 W	Form factor *	Rackmount/Tower
Waveform *	Sine	Rack capacity	2U
Input operation voltage (min) *	100 V	Product colour *	Black
Input operation voltage (max) *	280 V	LED indicators	Battery replacement
Input frequency *	50/60 Hz	Operational conditions	
Output operation voltage (min)	220 V	Operating temperature (T-T)	0 - 40 °C
Output operation voltage (max)	240 V	Storage temperature (T-T)	-20 - 50 °C
Output frequency regulation	50/60 Hz	Operating relative humidity (H-H)	0 - 95%
Surge energy rating	420 J	Storage relative humidity (H-H)	0 - 95%
Efficiency	89.1%	Operating altitude	0 - 3000 m
Crest factor	3:1	Non-operating altitude	0 - 15000 m
Emergency Power Off (EPO)	0	Certificates	
Noise level	50 dB	Compliance certificates	RoHS
Surge protection	✓	Certification	C-tick, CE, EN 50091-1, EN 50091-2, EN 55022 Class A, EN 60950, EN 61000-3-2, GOST, VDE, REACH, PEP, EOLI
Audible alarm(s)	✓	Packaging content	
Audible alarm modes	Low battery alarm, Overload alarm	Cables included	RS-232
Auto-restart	✓	Manual	✓
Ports & interfaces		Weight & dimensions	
AC outlet types	C13 coupler	Width	85 mm
Power plug	C14 coupler	Depth	483 mm
AC outlets quantity	6 AC outlet(s)	Height	432 mm
Number of output IEC jumpers	2	Weight	23 kg
Serial interface	✓		
Serial interface type	RS-232		
SmartSlot	✓		


Battery		Packaging data	
Battery technology	Sealed Lead Acid (VRLA)	Software CD	✓
Battery capacity	328 VAh	Package width	630 mm
Typical backup time at full load	13.8 min	Package depth	594 mm
Typical backup time at half load	32 min	Package height	286 mm
Battery life (max)	5 year(s)	Package weight	27.8 kg
Battery recharge time	3 h	Logistics data	
Hot-swap battery	✓	Products per pallet	6 pc(s)
Automatic battery test	✓	Harmonized System (HS) code	85078000
		Products per master (outer) case	1 pc(s)
		Other features	
		Nominal output voltage	230 V
		Nominal input voltage	230 V

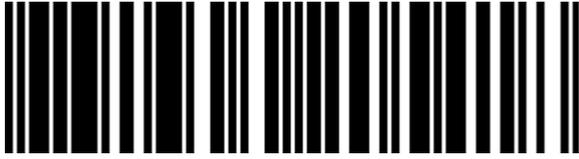

0731304205418



731304205418

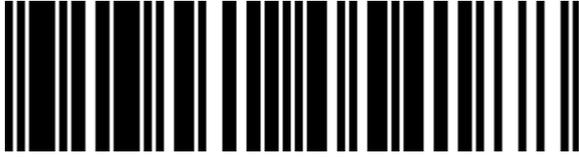

7313042054188

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.