

ASUS RT-N12E draadloze router Fast Ethernet Zwart, Metallic

Merk : ASUS

Artikelcode: 90-IG29002M01-3PA0

Productnaam : RT-N12E


RT-N12E - QoS, 5 x RJ45, WAN, LAN, 2.4, DHCP server, WAN DHCP client

ASUS RT-N12E. Wifi-standaard: Wi-Fi 4 (802.11n), WLAN gegevensoverdrachtsnelheid (max): 300 Mbit/s, Wi-Fi-standaarden: 802.11b, 802.11g, Wi-Fi 4 (802.11n). Interfacetype Ethernet LAN: Fast Ethernet, Ethernet LAN, data-overdrachtsnelheden: 10,100 Mbit/s, Bekabelingstechnologie: 10/100Base-T(X). Ondersteunde beveiligingsalgoritmen: 128-bit WEP, 64-bit WEP, WPA, WPA-PSK, WPA2, WPA2-PSK, WPS. Kleur van het product: Zwart, Metallic, LED-indicatoren: LAN, Stroom, WAN. Antenne-ontwerp: Extern



WAN-verbinding		Beveiliging	
Ethernet WAN *	✓	Network address translation (NAT)	✓
Draadloos LAN		Protocollen	
Wifi-standaard *	Wi-Fi 4 (802.11n)	DHCP client	✓
WLAN gegevensoverdrachtsnelheid (max) *	300 Mbit/s	Design	
Wi-Fi-standaarden	802.11b, 802.11g, Wi-Fi 4 (802.11n)	Kleur van het product	Zwart, Metallic
Netwerk		LED-indicatoren	LAN, Stroom, WAN
Ethernet LAN *	✓	Antenne	
Interfacetype Ethernet LAN *	Fast Ethernet	Antenne-ontwerp *	Extern
Ethernet LAN, data-overdrachtsnelheden	10,100 Mbit/s	Antennas quantity	2
Bekabelingstechnologie	10/100Base-T(X)	Energie	
Netwerkstandaard	IEEE 802.11b, IEEE 802.11e, IEEE 802.11g, IEEE 802.11i, IEEE 802.11n, IEEE 802.3, IEEE 802.3u	AC-ingangsspanning	110 - 240 V
Mobiel netwerken		AC-ingangsfrequentie	50 - 60 Hz
3G	✗	Power over Ethernet (PoE)	✓
4G	✗	Eisen aan de omgeving	
Poorten & interfaces		Bedrijfstemperatuur (T-T)	0 - 45 °C
Aantal Ethernet LAN (RJ-45)-poorten *	4	Temperatuur bij opslag	-20 - 70 °C
Aansluiting voor netstroomadapter	✓	Relatieve vochtigheid in bedrijf (V-V)	10 - 90 procent
Beheerfuncties		Luchtvochtigheid bij opslag	5 - 90 procent
Web-gebaseerd management	✓	Gewicht en omvang	
Beveiliging		Breedte	124 mm
Ondersteunde beveiligingsalgoritmen	128-bit WEP, 64-bit WEP, WPA, WPA-PSK, WPA2, WPA2-PSK, WPS	Diepte	168 mm
		Hoogte	30 mm
		Gewicht	210 g

Beveiliging		Overige specificaties	
Stateful Packet Inspection (SPI)	✓	Mobiele netwerkverbinding	✗
Filtratie	✓	Ondersteunde WLAN data-overdrachtsnelheden	1,2,5,5,6,9,11,12,18,24,36,48,54,300 Mbit/s
MAC adres filtering	✓	Stroom	0.5 A
		Filterbeschrijving	Port, IP, URL, MAC adres

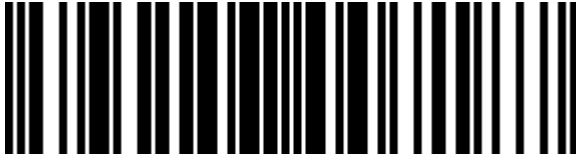

8594157007187




8595149005808



5712505337028



0610839397273



610839397273



4719543397275

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.