

VSMA-102 / VSMA-104 / VSMA-108



2 / 4 / 8-Port HDMI Splitter w/ Audio


► Specifications

| | | VSMA-102 | VSMA-104 | VSMA-108 |
|---------------------------|----------------|--|-----------------|-----------------|
| Number of VGA Output | | 2 | 4 | 8 |
| LED Indicators | Power Video OK | Dual Color x 1 | Dual Color x 1 | Dual Color x 1 |
| | Video Output | 2 | 4 | 8 |
| Max. Video Resolution | | Full HD 1080p (1920 x 1080), WUXGA (1920 x 1200) | | |
| Connectors | Input | HDMI Female x 1 Audio jack x 1 set | | |
| | Output | HDMI Female x 2 | HDMI Female x 4 | HDMI Female x 8 |
| | | Audio jack x 2 / 4 / 8 sets | | |
| Rack Mountable | | N/A | Yes | Yes |
| Enclosure | | Metal | | |
| Power Consumption (Max.) | | 2.8W | 4.1W | 10.2W |
| Dimensions H x W x D (mm) | | 44 x 180 x 85 | 44 x 220 x 135 | 44 x 438 x 180 |

► Features

- Easy and affordable way to duplicate one video input to multiple HDMI outputs.
- Automatic power-save when signal input is lost.
- Cascaded operation for increased signal outputs.
- Crisp clear video images
- Support EDID, HDCP, and is Blu-ray ready for high definition display
- Support DVI / HDMI display resolutions of up to UXGA (1600 x 1200), WUXGA (1920 x 1200), Full HD 1080p (1920 x 1080)
- Rack mountable (compatible for 4 / 8-Port only)
- Support audio function for HDMI / Audio over DVI source devices
- LED indicators for signal activity monitoring
- Accurate and reliable reproduction of digital video signals without attenuation and distortion
- Compatible with most of the popular screen resolution to XGA, SXGA, UXGA, WSXGA ...Full HD, WUXGA system
- Install in seconds

► Connection Pattern

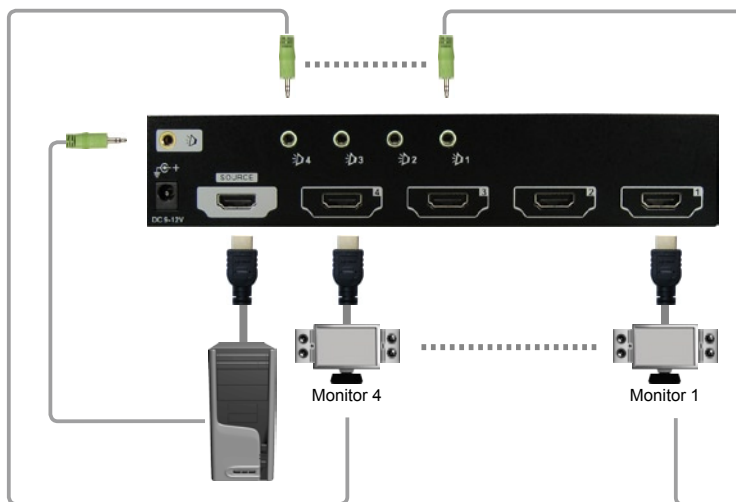

Converter (Option):
DVI-to-HDMI HDMI-to-DVI

