



TP-Link Omada SG2428LP netwerk-switch Managed L2/L2+ Gigabit Ethernet (10/100/1000) Power over Ethernet (PoE) Grijs

Merk : TP-Link

Productfamilie: Omada

Artikelcode: SG2428LP

Productnaam : SG2428LP



TP-Link Omada SG2428LP. Switch type: Managed, Switch-laag: L2/L2+. Type basis-switching RJ-45 Ethernet-poorten: Gigabit Ethernet (10/100/1000), Aantal basis-switching RJ-45 Ethernet-poorten: 24. MAC-adrestabel: 8000 entries, Switchingcapaciteit: 56 Gbit/s. Netwerkstandaard: IEEE 802.3af, IEEE 802.3at. Power over Ethernet (PoE). Rack-montage




Beheerfuncties		Beveiliging	
Switch type *	Managed	MAC adres filtering	✓
Switch-laag	L2/L2+	Wachtwoordbeveiliging	✓
Quality of Service (QoS)	✓	Multicast-functies	
Web-gebaseerd management	✓	Multicast-ondersteuning	✓
Cloud-beheerd	✓	Design	
ARP-inspectie	✓	Rack-montage *	✓
Poorten & interfaces		Kleur van het product	Grijs
Aantal basis-switching RJ-45 Ethernet-poorten *	24	LED-indicatoren	✓
Type basis-switching RJ-45 Ethernet-poorten *	Gigabit Ethernet (10/100/1000)	Prestatie	
Aantal moduleslots SPF	4	Fanloos	✓
Netwerk		Energie	
Netwerkstandaard *	IEEE 802.3af, IEEE 802.3at	Stroombron *	AC/PoE
10G support *	✗	AC-ingangsspanning	100 - 240 V
Datastroombeheer	✓	AC-ingangsfrequentie	50/60 Hz
Verbindingsaggregatie	✓	Vermogensverbruik (max)	184,7 W
Spanning tree protocol	✓	Power over Ethernet (PoE)	
Auto-negotiation	✓	Power over Ethernet (PoE) *	✓
VLAN=ondersteuning	✓	Aantal Power over Ethernet plus (PoE +)-poorten	16
Virtuele LAN-functies	MAC address-based VLAN, Protocol-based VLAN, Tagged VLAN, Voice VLAN	Vermogen per poort Power over Ethernet (PoE)	30 W
Aantal VLANs	4000	Totaal Power over Ethernet (PoE)-budget	150 W
Data-uitwisseling		Eisen aan de omgeving	
Switchingcapaciteit *	56 Gbit/s	Bedrijfstemperatuur (T-T)	0 - 40 °C
Verzending snelheid	41,66 Mpps	Temperatuur bij opslag	-40 - 70 °C

Data-uitwisseling		Eisen aan de omgeving	
MAC-adrestabel *	8000 entries	Relatieve vochtigheid in bedrijf (V-V)	10 - 90 procent
Jumbo Frames ondersteuning	✓	Luchtvochtigheid bij opslag	5 - 90 procent
Jumbo frames	9000	Warmtedissipatie	628 BTU/h
Packet buffergeheugen	4,1 MB	Gewicht en omvang	
Beveiliging		Breedte	440 mm
DHCP-functies	DHCP relay, DHCP server	Diepte	220 mm
Access Control List (ACL)	✓	Hoogte	44 mm
IGMP snooping	✓		



8885020620832

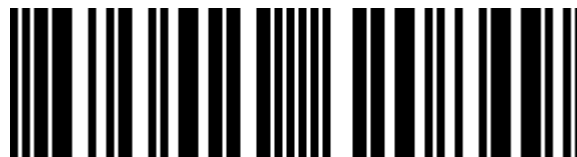

8885020620849



0810142820394



810142820394

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.