



TP-Link Omada ES205G Managed Gigabit Ethernet (10/100/1000) Power over Ethernet (PoE) Zwart



Merk : TP-Link

Productfamilie: Omada

Artikelcode: ES205GP

Productnaam : ES205G

TP-Link Omada ES205G. Switch type: Managed. Type basis-switching RJ-45 Ethernet-poorten: Gigabit Ethernet (10/100/1000), Aantal basis-switching RJ-45 Ethernet-poorten: 5. MAC-adrestabel: 8000 entries, Switchingcapaciteit: 10 Gbit/s. Netwerkstandaard: IEEE 802.1Q, IEEE 802.1ab, IEEE 802.1p, IEEE 802.3at, IEEE 802.3x. DC voltage input: 53.5 V. Power over Ethernet (PoE). Ophangstelsysteem voor aan de muur


Beheerfuncties		Design	
Switch type *	Managed	LED-indicatoren	✓
Quality of Service (QoS)	✓	Ophangstelsysteem voor aan de muur	✓
Cloud-beheerd	✓	Prestatie	
Poorten & interfaces		Fanloos	✓
Aantal basis-switching RJ-45 Ethernet-poorten *	5	Energie	
Type basis-switching RJ-45 Ethernet-poorten *	Gigabit Ethernet (10/100/1000)	Stroombron *	AC/DC
Netwerk		Vermogenstoevoer inclusief *	✓
Netwerkstandaard *	IEEE 802.1Q, IEEE 802.1ab, IEEE 802.1p, IEEE 802.3at, IEEE 802.3x	DC voltage input	53.5 V
10G support *	✗	Power over Ethernet (PoE)	
Port mirroring	✓	Power over Ethernet (PoE) *	✓
Datastroombeheer	✓	Hoeveelheid Power over Ethernet (PoE) ports	4
Verbindingsaggregatie	✓	Aantal Power over Ethernet plus (PoE +)-poorten	4
Auto MDI/MDI-X	✓	Vermogen per poort Power over Ethernet (PoE)	30 W
Auto-negotiation	✓	Totaal Power over Ethernet (PoE)-budget	65 W
VLAN-ondersteuning	✓	Eisen aan de omgeving	
Virtuele LAN-functies	MTU VLAN, Port-based VLAN, Tagged VLAN	Bedrijfstemperatuur (T-T)	0 - 40 °C
Optische vezel		Temperatuur bij opslag	-40 - 70 °C
Transmissie afstand (max)	0,25 km	Relatieve vochtigheid in bedrijf (V-V)	10 - 90 procent
Data-uitwisseling		Luchtvochtigheid bij opslag	5 - 90 procent
Switchingcapaciteit *	10 Gbit/s	Gewicht en omvang	
Verzending snelheid	7,4 Mpps	Breedte	100 mm
MAC-adrestabel *	8000 entries	Diepte	98 mm
Store-and-forward	✓	Hoogte	25 mm
Jumbo Frames ondersteuning	✓	Inhoud van de verpakking	
Jumbo frames	15	Gebruiksaanwijzing	✓
Packet buffergeheugen	4 MB	Verpakking	
Beveiliging		Type verpakking	Doos
DHCP-functies	DHCP client	Certificaten	
IGMP snooping	✓	Certificaten van naleving	CE, Federal Communications Commission (FCC), RoHS
Bescherming lus	✓		

Design

Kleur van het product	Zwart
Reset button	✓



8885020620948

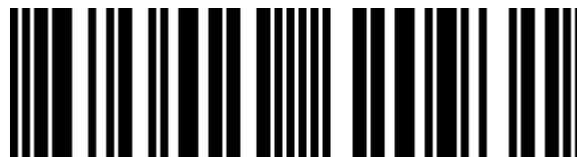

8885020620931



8885020620917



0810142820431



810142820431

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.