

Zyxel XGS1935-52HP Managed L2/L3 Gigabit Ethernet (10/100/1000) Power over Ethernet (PoE)

Merk : Zyxel

Artikelcode: XGS1935-52HP-EU0101F

Productnaam : XGS1935-52HP

- 10GbE Uplink Ports
  - NebulaFlex basisversie inclusief
  - PoE+ tot max. 375W in consumptie modus
  - Geavanceerde functie, statische routing, VLAN, QoS, IGMP Snooping, LAG, IPv6
  - Stille werking met smarte koeltechnologie
- XGS1935-52HP - 48-port GbE Lite-L3 Smart Managed Switch met 4x 10G Uplink




Zyxel XGS1935-52HP Managed L2/L3 Gigabit Ethernet (10/100/1000) Power over Ethernet (PoE):

Met behulp van 10GbE Uplink Switch met redelijke prijs  
Met Gigabit connectiviteit plus vier 10GbE uplinks is de XGS1935 serie een ideale optie voor diegenen die behoefte hebben aan basisfuncties, eenvoudiger beheer en een meer redelijke prijs om hun netwerken te upgraden en netwerkefficiëntie te garanderen voor continue bedrijfsproductiviteit.



Management features		Performance	
Switch type *	Managed	Mean time between failures (MTBF)	562941 h
Switch layer	L2/L3	Power	
Quality of Service (QoS) support	✓	Power source *	AC
Ports & interfaces		Power supply included *	✓
Basic switching RJ-45 Ethernet ports quantity *	48	AC input voltage	100 - 240 V
Basic switching RJ-45 Ethernet ports type *	Gigabit Ethernet (10/100/1000)	AC input frequency	50/60 Hz
SFP+ module slots quantity	4	Power consumption (max)	470.1 W
Network		Power protection features	Surge protection
Networking standards *	IEEE 802.1D, IEEE 802.1Q, IEEE 802.1p, IEEE 802.1s, IEEE 802.1w, IEEE 802.1x, IEEE 802.3, IEEE 802.3ab, IEEE 802.3ad, IEEE 802.3ae, IEEE 802.3af, IEEE 802.3at, IEEE 802.3az, IEEE 802.3u, IEEE 802.3x, IEEE 802.3z	Power over Ethernet (PoE)	
		Power over Ethernet (PoE) *	✓
		Total Power over Ethernet (PoE) budget	375 W
		Operational conditions	
10G support *	✓	Operating temperature (T-T)	-20 - 50 °C
VLAN support	✓	Storage temperature (T-T)	-40 - 70 °C
Data transmission	176 Gbit/s	Operating relative humidity (H-H)	10 - 95%
		Storage relative humidity (H-H)	10 - 95%
		Heat dissipation	324.495 BTU/h
		Weight & dimensions	
Switching capacity *	176 Gbit/s	Width	440 mm
Forwarding rate	130.9 Mpps	Depth	270 mm
MAC address table *	16000 entries	Height	43 mm
Jumbo frames support	✓	Weight	5.64 kg
Jumbo frames	9000	Packaging data	
Security		Package width	508 mm
DHCP features	DHCP Option 82, DHCP client, DHCP relay, DHCPv6 client	Package depth	394 mm
		Package height	90 mm

Multicast features		Packaging data	
Multicast support	✓	Package weight	12.4 kg
Design			
Rack mounting *	✓		
Performance			
Internal memory	512 MB		
Flash memory	32 MB		

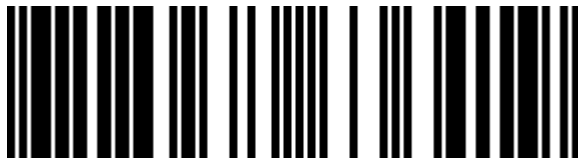

4718937636419

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 20-MAR-2025. Prints or copies of Information are only valid on the printed Publication date