DIGITUS Professional CAT 6A U-UTP twisted pair installation cable

DK-1613-A-VH-305
EAN 4016032344100

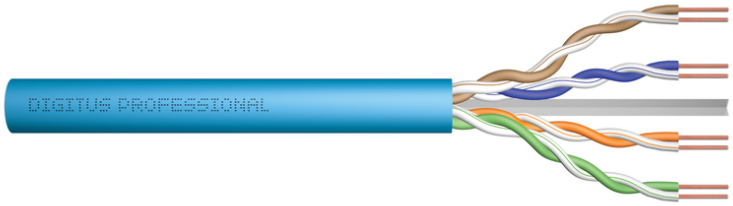

DIGITUS CAT 6A U-UTP installation cable, raw Length 305 m, Paper Box, LSOH, AWG 23, Simplex Color light blue RAL 5012

DIGITUS® Category 6A U-UTP installation cables are manufactured and tested to the ISO/IEC 11801, TIA/-586-C.2 and EN 50173 Category 6A specifications. Every cord consists of 8 color coded AWG 23 polyethylene insulated con-ductors. The conductors are twisted together to form 4 pairs with varying lay lengths. Printing details along the outer sheath includes the brand name and item code. The cable is packed in a paper pullout box which makes the installation easy.

Best performance and link quality for your network.

- Physical properties:
- Basic conductor: Solid AWG 23/1, bare annealed copper, diameter 0.57 mm nominal
- Insulation: HD-PE
- Total number of insulated conductors: 8, twisted in 4 pairs
- Color code: blue-white, orange-white, green-white, brown-white
- Individual pair shield: None
- Overall shielding: None
- Outer jacket: Halogen-free (FRNC-B/LSZH-1)
- Outer jacket diameter: 0.9 mm nominal
- Color: Light blue (RAL 5012)
- Mechanical properties:
- Tensile loading: 150N max.
- Dynamic bending radius: 8x AD mm min.
- Static bending radius: 4x AD mm min.
- Shipping- and storage temperature range: -20 °C up to +60 °C
- Operating temperature range: -20 °C up to +75 °C
- Installation temperature range: 0 °C up to +50 °C
- Overall diameter: 7.0 mm nominal
- Flame retardancy: IEC 60332-1
- Halogen-free & smoke-proof: IEC 60754-2 & IEC 61034
- Fire load: 295 Mj/km
- Electrical properties:
- Mean impedance: 100±5Ohm at 1MHz - 600MHz
- Capacitance: 40 pF/m nominal @ 1 KHz
- Capacitance unbalance (pair-ground): 1.6 pF/m max. @ 1 KHz
- Insulation resistance: 5 GOhm x km min.
- DC loop resistance: 147 Ohm/km max. (2% max. resistance unbalance)
- Voltage resistance: 72 Vdc max.
- Coupling attenuation: 65 dB
- Signal propagation delay: 450 nS/100 m max.
- Propagation delay: 15 nS/100 m max.
- Separating class: “c” acc. to EN 50174-2
- NVP: 70%
- Category: CAT 6A
- Shielding: U-UTP, unshielded
- Structure: 4 x 2 AWG 23/1, solid twisted pair
- Color: light-blue
- Length: 305 m
- Jacket: LSOH

Druckfehler, Irrtümer und technische Änderungen sind vorbehalten. | Printing errors, falsities and technical changes remain reserved.