



SVGA Monitor Cable

HD15 Male / HD15 Male, Black

Reliable connections for superior signal quality.

MANHATTAN® SVGA Cables easily connect a monitor with a desktop or notebook computer. Ideal for use with video splitters, KVM switches and any HD15-equipped display, computer or device, MANHATTAN SVGA Cables are engineered and constructed of quality materials to deliver dependable transmissions in video applications. Full foil and braided shielding, molded boots with strain relief and mini-coax (RGB) and paired video wire construction help provide maximum conductivity and clear, crisp images with reduced EMI interference and distortion over extended distances.

Model	Length
311731	1.8 m (6 ft.)
311748	3.0 m (10 ft.)
312721	4.5 m (15 ft.)
372978	7.5 m (25 ft.)
312776	10 m (33 ft.)
313629	15 m (50 ft.)
335607	20 m (66 ft.)
337342	30 m (100 ft.)


Lifetime Warranty

Strict manufacturing standards ensure the highest quality in all MANHATTAN products. All items carry a full Lifetime Warranty — the strongest quality commitment anyone can make.

Model
311731
311748
312721
312776
313629
335607
337342
372978



REV.	DESCRIPTION	ENG.	APPROVAL
B			

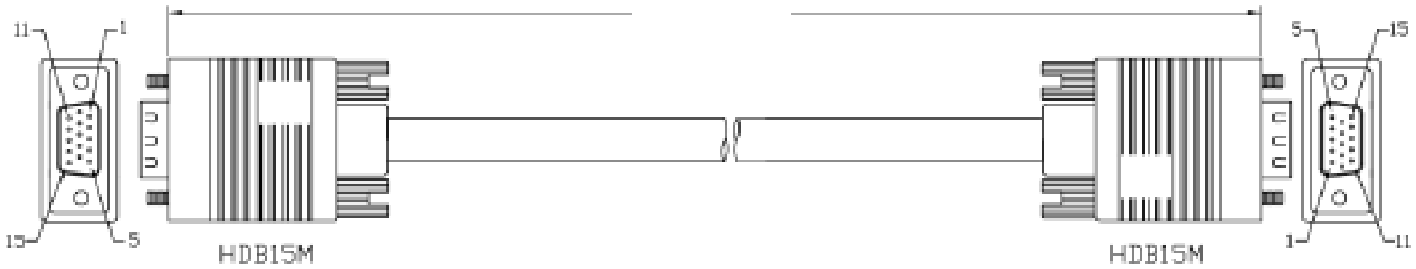

NOTE:

1. CABLE: 28AWG, UL2919, AL+B, 3COAXIAL+6C, BLACK COLOR, OD=8.0mm, PVC JACKET.
2. LENGTH: 1800mm
3. CONNECTOR: HDB15P*2(FULL PIN, BLACK INSULATOR)
4. SCREW: R37.7 SCREW *4

5. CONTACTS:

HD15M	HD15M
1	1 CENTER
6	6 SHELL
2	2 CENTER
7	7 SHELL
3	3 CENTER
8	8 SHELL
4	4
5	5
10	10
11	11
13	13
14	14
64	64

- 6 MOLD: SQUARE MOLDING.
7. OPEN/SHORT TEST: 100% TEST. INSULATIONS: 3M.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MANHATTAN AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF MANHATTAN.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCES: ±1°

TOLERANCES (MM)		TOLERANCES (IN)	
0	+0.07	0	+0.003
0.1	+0.07	0.1	+0.003
0.25	+0.08	0.25	+0.003
0.50	+0.08	0.50	+0.003



TITLE:	APPD:	
	Check:	XIE
CUSTOMER:	Drawn:	ZXW
	Unit:	mm
	Projection:	1st
CUSTOMER P/N:	Scale:	1:1
DATE:	Rev:	001
DRWG. NO.:	Sheet:	1 of 1

Features

- HD15 male to HD15 male
- Connects SVGA source to SVGA display
- Fully shielded to reduce EMI and other interference sources
- Molded PVC boot with strain relief
- Lifetime Warranty

Specifications

STANDARDS/CERTIFICATIONS

- UL 2919

CONTACTS

- (2) 15-pin HD male connections
- Nickel plated
- Molded PVC boot
- Built-in strain relief
- Mini-coax (RGB) and paired video wire

DIMENSIONS

- Overall diameter: 8.0 mm (0.31 in.)

CABLE

- 28 AWG cable
- Withstanding voltage: 300 V DC
- Thermal plastic casing
- Foil and braided shielding

PACKAGE CONTENTS

- SVGA Monitor Cable

For more information on MANHATTAN products, consult your local dealer or visit www.manhattan-products.com.



Copyright © MANHATTAN

