

ZYXEL

Zyxel NWA55BE 5100 Mbit/s Wit Power over Ethernet (PoE)

Merk : Zyxel

Artikelcode: NWA55BE-EU0102F


Productnaam : NWA55BE

Zyxel NWA55BE. 2,4 GHz, 5 GHz, Maximale overdrachtssnelheid van gegevens: 5100 Mbit/s. Ondersteunde beveiligingsalgoritmen: WEP, WPA, WPA2, WPA3, 802.1x RADIUS. Power over Ethernet (PoE). Kleur van het product: Wit



Kenmerken		Design	
2,4 GHz *	✓	Plaatsing *	Muur
5 GHz *	✓	Kleur van het product *	Wit
Maximale overdrachtssnelheid van gegevens *	5100 Mbit/s	Internationale veiligheidscode (IP)	IP55
Maximale overdrachtssnelheid van gegevens (2.4 GHz)	688 Mbit/s	Antenne	
Maximale overdrachtssnelheid van gegevens (5 GHz)	4324 Mbit/s	Soort antenne *	Extern
Bandbreedte	0,24 GHz	Antennefuncties	Afneembare antenne
Netwerkstandaard	IEEE 802.11be, IEEE 802.11ax, IEEE 802.11ac, IEEE 802.11n, IEEE 802.11g, IEEE 802.11b, IEEE 802.11a, IEEE 802.3at, IEEE 802.3bt	Antennas quantity	2
Wifi Multimedia (WMM)/(WME)	✓	Antenne versterkingsniveau (max)	3 dBi
Snelle roaming	✓	Prestatie	
VLAN=ondersteuning	✓	Type processor	✓
Draadloze isolatie	✓	Certificaten	
Bandbreedteaansturing	✓	Certificaten van naleving	Federal Communications Commission (FCC)
Cellulair co-existentie filter (CCF)	✓	Certificering	FCC Part 15C, FCC Part 15E, FCC Part 2.1091, ETSI EN 300 328, EN 301 893, Draft EN 303 687, EN 50385, EN 50665, EN IEC 62311, LP0002, FCC Part 15B, EN 301 489-1, EN 301 489-17, EN55032, EN55035, EN61000-3-2/-3, EN60601-1-2, BSMI CNS15936, EN 62368-1, IEC 62368-1, BSMI CNS15598-1
Zendvermogen	26 dBmW	Gewicht en omvang	
Mean time between failures (MTBF)	631165 uur	Breedte	308 mm
Beveiliging		Diepte	136,4 mm
Ondersteunde beveiligingsalgoritmen *	WEP, WPA, WPA2, WPA3, 802.1x RADIUS	Hoogte	49,6 mm
MAC adres filtering	✓		
Auto Wireless Distribution System (WDS)	✓		

Beheerfuncties		Gewicht en omvang	
Opdrachtregelinterface (CLI)	✓	Gewicht	575,6 g
Cloud-beheerd	✓	Verpakking	
Upgraden van firmware mogelijk	✓	Breedte verpakking	221 mm
Poorten & interfaces		Diepte verpakking	188 mm
Aantal Ethernet LAN (RJ-45)-poorten *	1	Hoogte verpakking	59 mm
Energie		Gewicht verpakking	984,5 g
Power over Ethernet (PoE) *	✓	Eisen aan de omgeving	
Stroomverbruik (typisch)	24 W	Relatieve vochtigheid in bedrijf (V-V)	10 - 90 procent
		Bedrijfstemperatuur (T-T)	-25 - 65 °C
		Temperatuur bij opslag	-40 - 70 °C
		Luchtvochtigheid bij opslag	10 - 90 procent

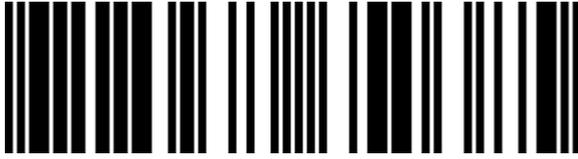

4718937650385

Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.