


ROHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE

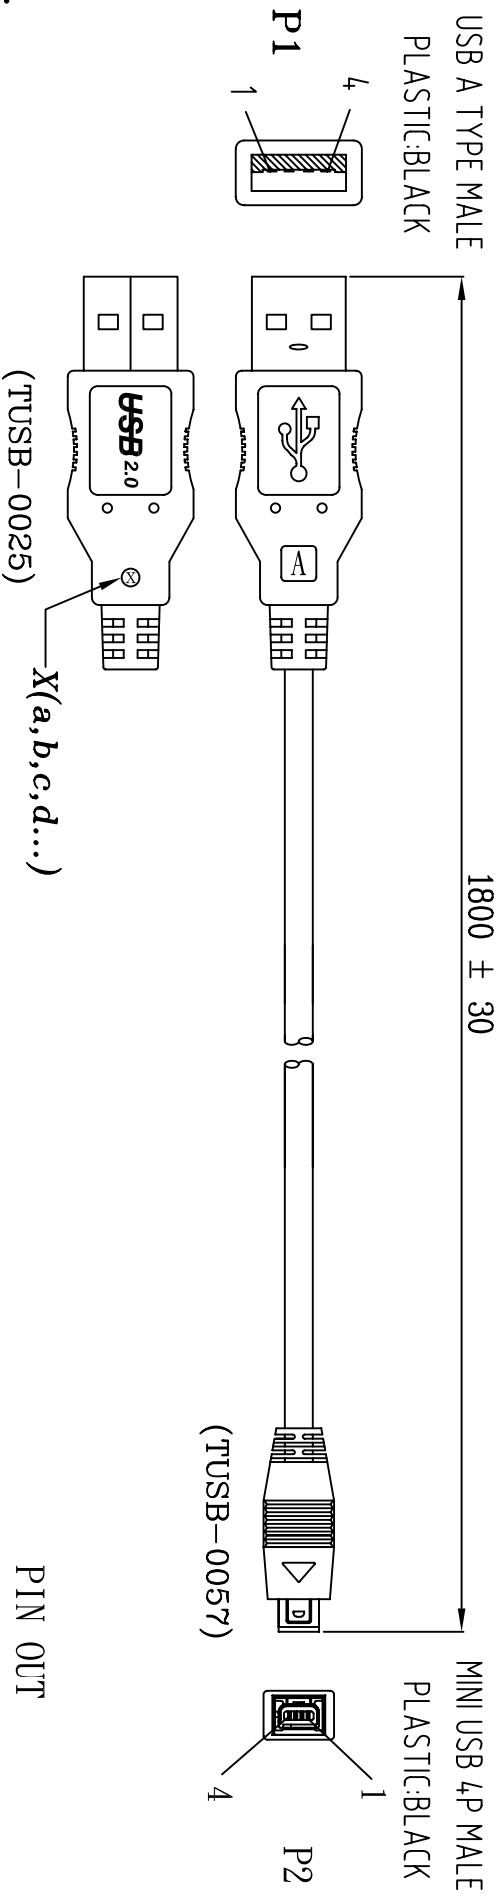

NOTES:

1. CABLE:

UL-2725 [28AWG(7/0.127 T.C)*1PAIR+28AWG(7/0.127 T.C)*2C
+AL/MY+DRAIN WIRE+BRAID(65% ALUMINUM)] PVC JACKET;

OD:φ3.8±0.15mm COLOR:MATT BLACK(NK-K01) REV 2.0,(C2725525BA)

2. CONNECTORS:

P1:USB A TYPE MALE GOLD PLASH CONTACT,
NICKEL PLATED SHELL.

P2:MINI USB 4P MALE GOLD FLASH CONTACT
NICKEL PLATED SHELL OR EQUIVALENT (HIROSE).

3.HOOD:MOLDED TYPE, PVC 45P, COLOR:BLACK(NK-K01)

4.ELECTRICAL TEST:

<1>.100% OPEN SHORT & MIS WIRE TEST.

<2>.CONTACT RESISTANCE 3 Ohms MAX.

<3>.INSULATION RESISTANCE 10M Ohms MIN.

5.PACKING:<1>EACH PC/POLYBAG+EAN CODE LABEL & ROHS LABEL

<2>EACH CARTON/ROHS LABEL(L*W=35*22mm)+EAN CODE LABEL


<3>EAN CODE: 4260113564196


	P1	PIN OUT	P2
RED	1	_____	1
WHITE	2	_____	2
GREEN	3	_____	3
BLACK	4	_____	4
SHELL	_____	DRAIN+BRAID	SHELL

Tolerance	Inch	M/M	2DIRECt GMBH			
.X	.015	.30	Title USB 2.0 AM / HIROSE MINI USB 4P B CABLE			
.XX	.010	.10				
.XXX	.005	.05				
Draw	FANNIE 02/26/07		Customer P/N:	CU0018		
Check	App'd		Customer:	E-DIR		
Engnr	Scale	NONE	Units	m/m	Third Angle Projection	Dwg No. 170-3047 REV:A Sheet 1/2

LTR	REV.	DESCRIPTION	DATE

POLYBAG

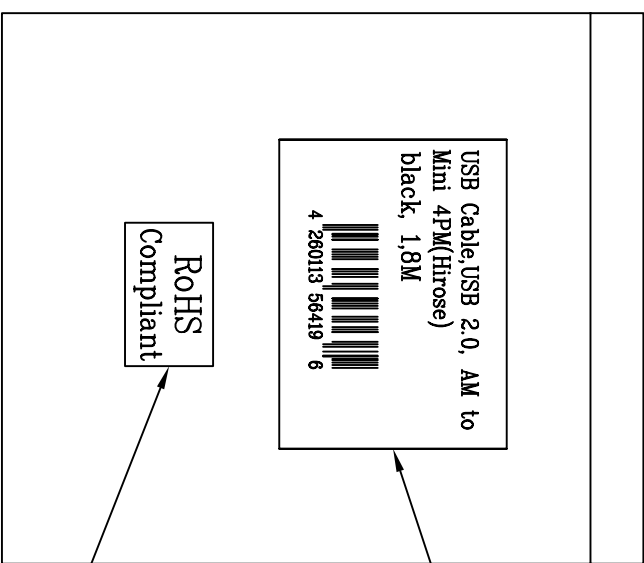



USB Cable,USB 2.0, AM to Mini 4PM(Hirose) black, 1.8M

 4 260113 56419 6

RoHS Compliant

LABEL POSITION

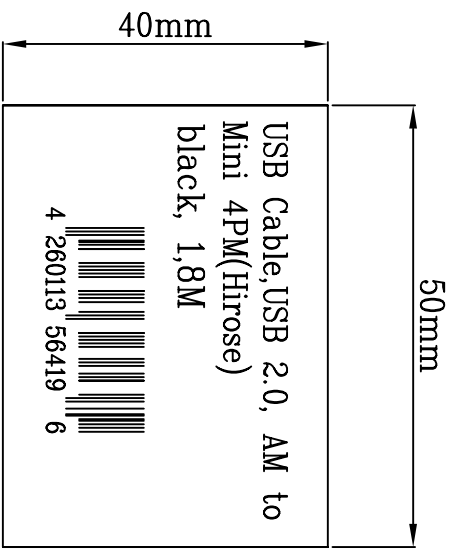WHITE BASE BLACK WORDS
 (L*W= 35*22mm)




USB Cable,USB 2.0, AM to Mini 4PM(Hirose) black, 1,8M

 4 260113 56419 6

LABEL
 (#=CABLE LENGHTH)

Tolerance	Inch	M/M
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

Draw	FANNIE 02/26/07		
Check	Customer P/N: CU0018		
App'd	App'd	Customer:	E-DIR
Scale	NONE	Units	m/m
Dwg No.	170-3047	REV:	A

Title	
USB 2.0 AM / HIROSE MINI USB 4P B CABLE	
Third Angle Projection	
Sheet	2/2