


Delock Converter Mini PCIe > M.2 Key B slot + Micro SIM slot

Description

This converter by Delock enables the connection of an M.2 module in 2280, 2260, 2242, 2230, 3042 or 3030 format. The converter can be installed into the system through a Mini PCIe interface. At the predetermined breaking points, the length can be shortened. The converter supports modules with SATA, USB or PCIe (x1) signal transfer. Further there is the possibility to insert a Micro SIM card in the slot and use with an appropriate M.2 module.

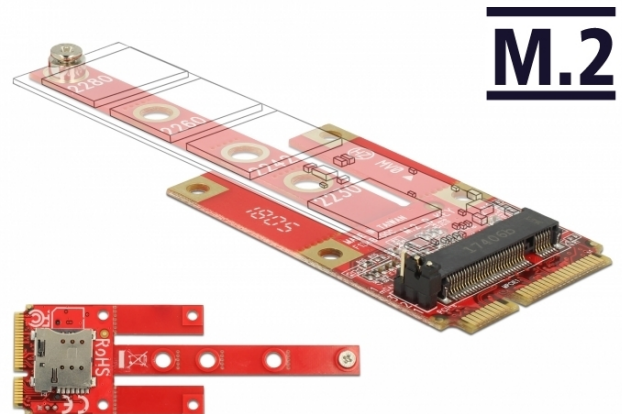

Specification

- Connectors:
 - 1 x Mini PCIe male >
 - 1 x 67 pin M.2 key B slot
 - 1 x Micro SIM slot
- Interface: USB 2.0 / PCIe / SATA
- Form factor: Mini PCIe full size / half size
- Supports M.2 modules in format 2280, 2260, 2242, 2230, 3042 and 3030 with key B or key B+M based on USB / PCIe / SATA
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Jumper for PCIe / USB or SATA module setting
- Dimensions (LxW): ca. 93 x 30 mm

System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, ex Linux Kernel 2.6.38
- Motherboard with a free Mini PCIe slot with a USB / PCIe / SATA interface

Package content

- Converter
- Screws
- User manual

Item no. 63384


EAN: 4043619633845

Country of origin: Taiwan, Republic of China

Package: Retail Box



Images

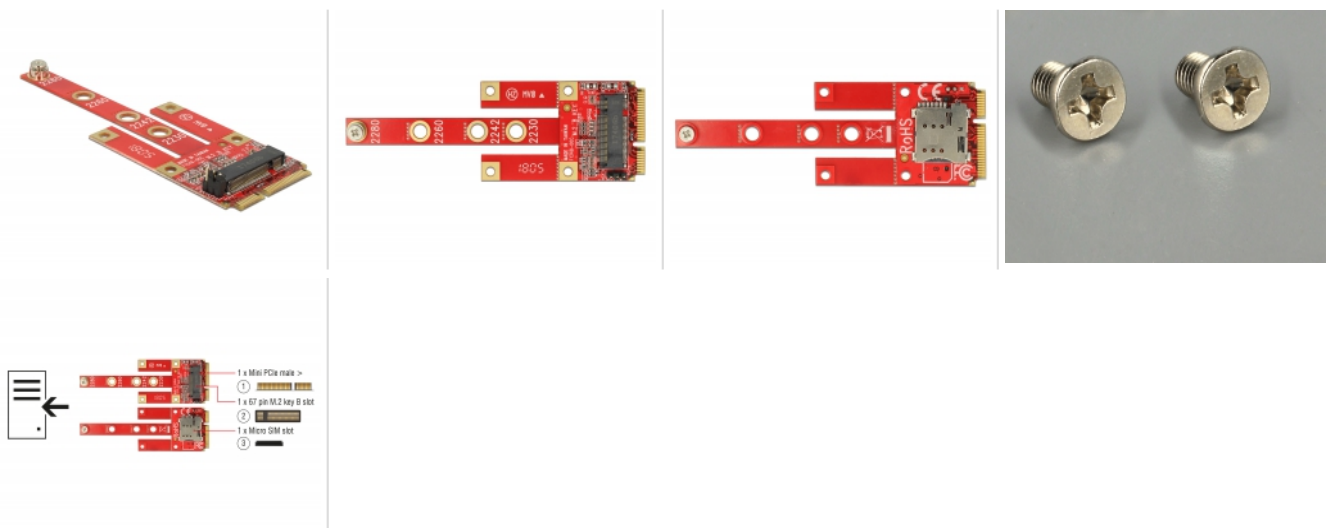

General	
Form factor:	MiniPCIe full size MiniPCIe half size
Slot:	PCIe SATA USB
Supported module:	M.2 modules in format 2280, 2260, 2242, 2230, 3042 and 3030 with key B or key B+M based on USB / PCIe / SATA
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported
Interface	
Connector 1:	1 x Mini PCIe male
Connector 2:	1 x 67 pin M.2 key B slot
connector 3:	1 x Micro SIM slot
Physical characteristics	
Length:	90 mm
Width:	30 mm