




Delock PCI Express Card > 3 x external FireWire B + 1 x internal FireWire A

Description

This PCI Express card by Delock expands the PC by three external FireWire 800 ports as well as one internal FireWire 400 port. Different FireWire devices such as external enclosure, digital cameras, camcorders, adapters etc. can be connected to this card.

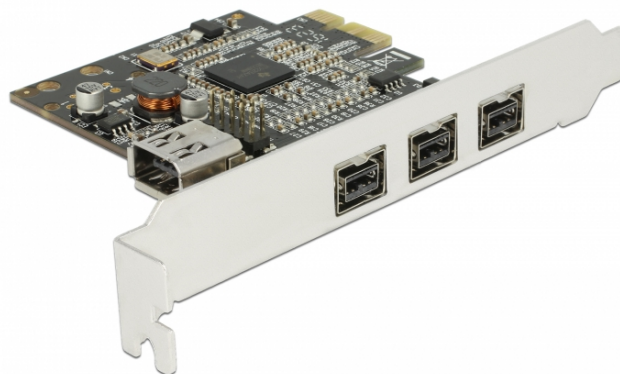

Specification

- Connectors:
 - external:
 - 3 x FireWire 1394B 9 pin female
 - internal:
 - 1 x PCI Express x1, V1.0a
 - 1 x FireWire 1394A 6 pin female
 - 1 x 9 pin pin header (shared with internal FireWire A)
- Chipset: Texas Instruments
- Data transfer rate:
 - FireWire A up to 400 Mbps
 - FireWire B up to 800 Mbps
- Supports OHCI specifications V1.0 and 1.1
- Hot Swap, Plug & Play

System requirements

- Windows 7/7-64/8.1/8.1-64/10/10-64, ex Linux Kernel 2.6.x / Kernel 4.9.x
- PC with one free PCI Express slot

Package content

- PCI Express card
- Driver CD
- User manual

Item no. 89864



EAN: 4043619898640

Country of origin: China

Package: Retail Box



Images



**General**

| | |
|-----------------------------|-----------------------|
| Function: | Hot Plug |
| | Hot Swap |
| Supported operating system: | Windows 7 32-bit |
| | Windows 7 64-bit |
| | Windows 8.1 32-bit |
| | Windows 8.1 64-bit |
| | Windows 10 32-bit |
| | Windows 10 64-bit |
| | ex Linux Kernel 2.6.x |
| | ex Linux Kernel 4.9 |

Interface

| | |
|-----------|---------------------------------|
| External: | 3 x FireWire 1394B 9 pin female |
| Internal: | 1 x FireWire 1394A 6 pin female |
| | 1 x PCI Express x1, V1.0a |

Technical characteristics

| | |
|----------|-------------------|
| Chipset: | Texas Instruments |
|----------|-------------------|

Physical characteristics

| | |
|---------------|----------|
| Slot bracket: | standard |
|---------------|----------|