

T.B. RGB



Expansion Unit UCTBRGB14-SG
2 Fan Pack UCTBRGB14-BP2



- ▶ Stunning RGB Lighting Effects
- ▶ RGB Sync Ready
- ▶ Handy 3-in-1 Remote Control

T.B.RGB applies exclusive ENERMAX LED LIGHTING Technology to deliver incredibly bright and even RGB lighting. With the patented Twister Bearing technology, the T.B. RGB fan can not only provide beautiful lighting effects, but also offer superior silent performance. The series comes with ENERMAX RGB control box that can support up to 8 x RGB fans and 2 x RGB LED devices. Furthermore, users can use the included 3-in-1 remote control to easily select preferred RGB lighting effects, colors and fan speed; no software or APP is required. T.B.RGB is the excellent RGB fan to light up your systems.



Features



- ▶ Unique halo arc-shaped frame shows gorgeous and vivid visual effect

- ▶ Perfect for 280mm liquid cooling radiator



ENERMAX LED LIGHTING Technology provides consistent and uniform luminance

T.B.RGB



Incredibly bright and even lighting with no visible spots

Others



Uneven lighting with visible spots



Synchronizable RGB lighting via motherboard (4-pin RGB header)

Compatible with the 4-pin RGB header(s) on motherboards.

The 3-in-1 remote control enables users to easily select preferred RGB lighting effects, colors and fan speed



Function Brightness / Lighting Speed

OFF/ON

Fan Speed Fast/Slow

Motherboard Sync switch

Preset 10 colors with flash effect

Colors RGB colors automatically rotate

Fix your preferred color in RGB mode

LED colors

Light Effects Flash

Sparkle


Beat

3 modes repeated

ENERMAX RGB control box can support up to 8 x RGB fans and 2 x RGB LED devices



Patented Twister Bearing technology

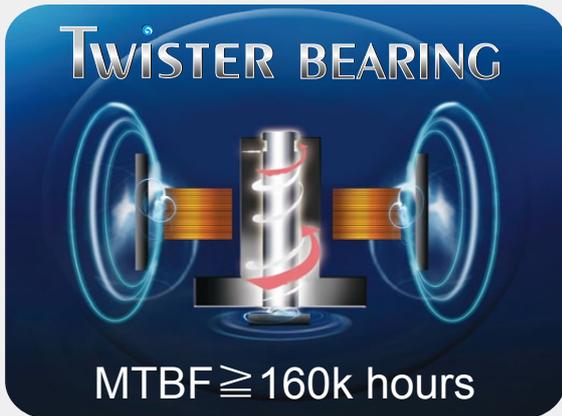

Shockproof rubber pads minimize vibration during operation

Specifications

Model Number	UCTBRGB14-SG	UCTBRGB14-BP2
Fans/Model	1 pcs	2 pcs
Dimension (mm)	140 (W) x 140 (H) x 25 (D)	
Speed (RPM)	1200 (±10%) *500-1200 (±10%) via remote-control	
Air Flow (CFM)	56.89 (max)	
Air Flow (m³/h)	96.65 (max)	
Static Pressure (mm-H ₂ O)	1.18 (max)	
Maximum Noise (dBA)	21	
Rated Current-Fan (A)	0.2	
Rated Current-RGB LED (A)	0.35	
Rated Voltage (V)	12	
MTBF (hours)	≧ 160,000 @ 25°C	
Connector	6-PIN	
Accessory	4 x Screw	8 x Screw 1 x RGB control box 1 x Remote control

Shipping Information

Barcode	EAN	4713157723482	4713157723499
	UPC	819315023488	819315023495
Box Dimension		145 x 160 x 28 mm	150 x 200 x 61 mm
Gross Weight / Unit		221 g	627 g
Carton Dimension		500 x 310 x 310 mm	560 x 415 x 325 mm
Q'ty / Carton		60 pcs	32 pcs
Gross Weight / Carton		14.5 kg	21.5 kg