


Delock 2.5" Converter U.2 SFF-8639 > M.2 NGFF NVMe Key M

Description

This Delock converter enables the connection of a M.2 NGFF SSD in 2280, 2260, 2242 and 2230 format. The converter can be installed into your system internally through the U.2 68 pin interface.

M.2 **U.2**
NVMe

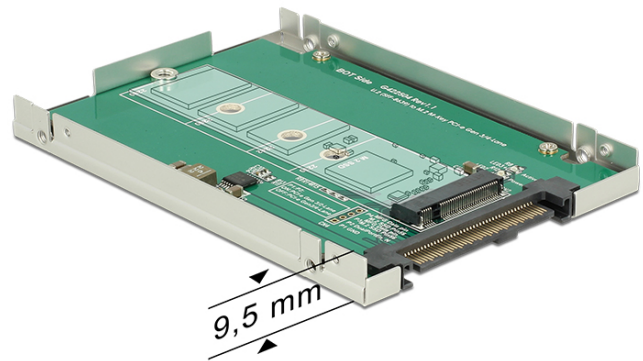

Specification

- Connector:
 - 1 x U.2 SFF-8639 male >
 - 1 x 67 pin M.2 NGFF key M slot
- Interface: PCIe (2 or 4 lanes)
- Supports M.2 NGFF modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.5 mm application of double-sided assembled modules supported
- Jumper for 2 or 4 lanes setting M.2 SSD
- LEDs for power and activity
- Supports NVM Express (NVMe)
- Maximum power consumption: 13.2 W
- Short circuit protection, in-rush current suppression, over heating protection
- Dimensions (LxWxH): ca. 100 x 65 x 7 mm

System requirements

- Windows 7/7-64/8/8-64/8.1/8.1-64/10/10-64, Linux Kernel 3.16
- A free U.2 SFF-8639 interface or
- A free SFF-8643 interface

Package content

- Converter
- 2.5" enclosure
- 1 x fixing screw for M.2 module

Item No. 62710


EAN: 4043619627103

Country of origin: Taiwan, Republic of China

Package: Box



Images



General	
Form factor:	2.5"
Supported operating system:	Linux Kernel 3.16 Windows 7 32-bit Windows 7 64-bit Windows 8 32-bit Windows 8 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit
LED indicator:	power and activity
Supported module:	M.2 NGFF modules in format 22110, 2280, 2260 and 2242 with key M or key B+M based on PCIe
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported
Interface	
Connection 1:	1 x M.2 NGFF based on PCIe
Connection 2:	1 x U.2 SFF-8639 male
Technical characteristics	
Maximum power consumption:	13.2 W
Physical characteristics	
Length:	100 mm
Width:	65 mm
Height:	7 mm