


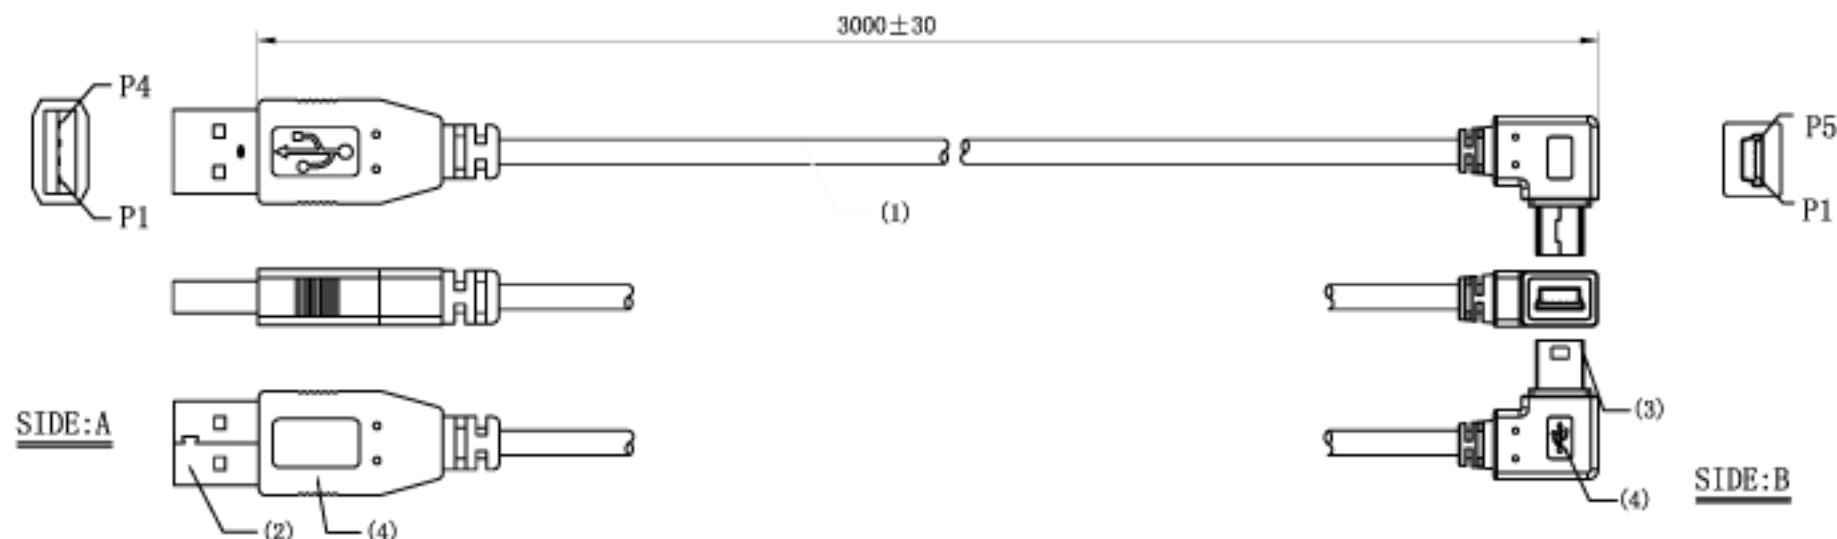

NOTE:

- (1). Cable Spec: UL2725 28AWG (7/0.12mmCu)*1P+24AWG (7/0.20mmCu)*2C+ D(7/0.12CU) +Al-foil+B[16*3 (0.12) ALMG]

Jacket Material: PVC OD: 4.5 ± 0.2mm

Cable Colour: Black

Cable Printing: USB 2.0 CABLE FULLY RATED

- (2). Connector A: USB 2.0 A Male Solder Type

INSULATION: Black

CONTACTS: Phosphor Bronze, Gold Plated

SHELL: Brass, Nickel Plated

- (3). Connector B: MINI 5PIN Male Solder Type

INSULATION: Black

CONTACTS: Phosphor Bronze, Gold Plated

SHELL: Brass, Nickel Plated

- (4). Over Molding colour: PVC-45P-Black

- (5). Parameter Settings: CT-8681FA

1. Conductive Resistance: 2.5 Ω


2. Insulative Resistance: 5M Ω (Min.)

3. 250V/AC, DC, 1.5mA/I, 50Hz, 0.03s

- (6). Packing: POLYBAG Packing

SIDE:A


USB AM

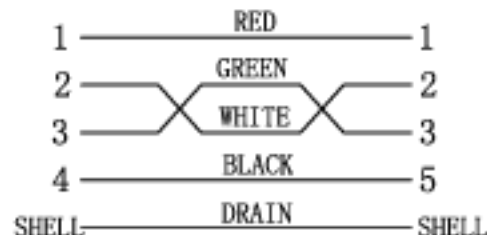

SIDE:B

MINI 5PM

PIN OUT: (5)

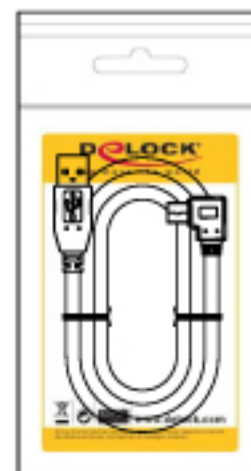

PACKING: (6)

GENERAL TOLERANCES
(UNLESS SPECIFIED)

LENGTH: X ± 1
.X ± 0.2
.XX ± 0.10
ANGLE: X° ± 1°
.X° ± 0° 30'

82683

UNIT:mm

REV:0/A

DRAWING

OYF

2010/06/25

S. P. NO.

NAME

USB 2.0 AM/MINI 5PM

CHECK

P. O. NO.

DWG. NO.

APPROVE

SIZE

PAGE

1/1

0

2010/06/25

REV

DESCRIPTION

DATE